



Jack Wechat



Jack Sewing Machine Co.,LTD.

JACK SEWING MACHINE CO.,LTD.

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com

JACK

China No.1

Shanghai stock

listed

“Make the service smarter
Guide the industry future”





ABOUT JACK

Jack Sewing Machine Co.,Ltd was founded in August 2003, sewing machine industry originated in July 1995. Jack is an international high-tech enterprise which focusing on industrial sewing machinery research and development, production and marketing . After years of management and development, the company has become a leading scale of industrial sewing machine manufacturer and one of the largest production and sales enterprises, especially have absolute pioneering advantage in the lockstitch, overlock and interlock sewing machines. On 19 January 2017, Jack has successfully listed on the main board of the Shanghai Stock Exchange (Name as "Jack stock", stock code: 603337).

Since the establishment, Jack has regarded technology research and development as the core driving force for development. As early as 2006, the introduction of advanced IPD (integrated product development) concept, after years of exploration and practice, has formed a set of industry-leading technology research and development system. At the same time, as the "national enterprise technology center", Jack has formed the industry's largest R & D team, strong talent reserve promoted the innovation and development of enterprises. At present JACK declares to be the largest number of invention patents company in world's sewing industry with over 800 patents in consecutive 4 years.

CHINA NO.1

JACK vigorously promotes the integration of the two innovation, and enhance the ability to respond to the market changes quickly. With the corporate mission: provide the best sewing machinery with optimum cost-performance ratio to all, and the corporate spirit: harmony, honesty, struggling, rise, JACK keeping pace with the times, developing and innovating to follow up a new round of global industrial revolution, to build the "WISDOM FACTORY" with wisdom data, intelligent manufacturing and intelligence services, therefore making unremitting efforts to create "the NO.1 Sewing Machine Brand all Over the World".

JACK have got great achievement such as

NO.1 of Sewing Machine Industry in China Light Industry Comprehensive Evaluation;

No.1 of Export Sales for Consecutive Eight Years;

No.1 Sales in Quantity in Sewing Machine Field all Around the Word.

JACK is worthy the title of "China No.1"

MAKE CUSTOMER HAPPY



ZARA

BOSS
HUGO BOSS

**UNI
QLO**

Semir
森馬

ETERNA

Bally Barclay
SHOE FASHION

Metersbonwe
美特斯·邦威

波司登
BOSIDENG
HIGH QUALITY COSTUME

adidas

NIKE

PUMA

LI-NING

PEAK

HLA
海澜之家

浪莎
Langsha

报喜鸟
SAINT ANGELO

JUDGER 佳吉

南极人
NANJIREN

PEACBIRD
太平鸟集团

LUOLAI
罗莱家纺

罗兰家纺

Amer
爱慕

天堂伞业

FEI ZI 菲姿
WOMEN'S WEAR

HU BAO
CLASSIC
虎豹男装

EVER-GLORY

沛浪
PEI LANG

大帝集团
MONNARCH GROUP

YISHION 以纯

FAPA 法派

千千万
kikiw'n

帝牌男装

Yeba
黑豹集团

宏达制衣

GBIQ
斯美泰包袋

QIAOZHIWANG
Comfortable Wear
乔治王

洛兹集团

恒安集团
HENGAN

ASIA LINK GROUP, INC.
联亚集团有限公司

國人西服
GUOREN

QINMAN
琴曼

AOBENNI 奥奔妮

GXG
GILL MIX GREEN

PERTER TEVERE
派登服饰

JODOLL
乔顿服饰


洁丽雅
grace

WONDERFUL JACK



STRONG R&D STRENGTH

- 7 R&d Centre
- 500 Members R&d Team
- 800 Patents, Leading the Industry

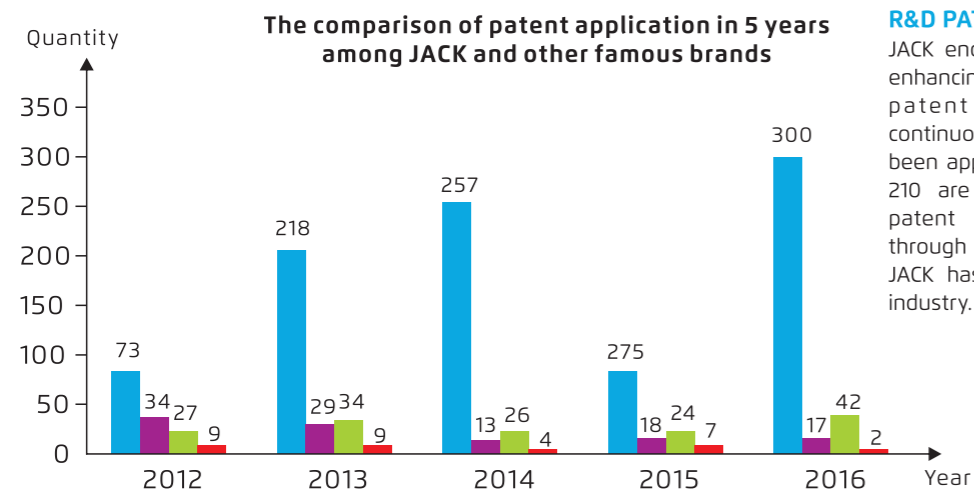


R&D PATENT

JACK encourages innovation and keeps enhancing creativity. From year 2012 the patent quantity has increased continuously, and 300 patents have been applied in year 2016, during which 210 are the innovation patents. The patent quality and technical breakthrough improved continuously. Now JACK has the most patents in sewing industry.



JACK HONOR

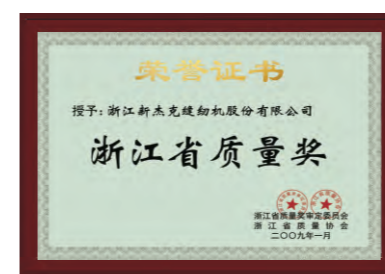

Zhejiang Quality Award



Zhejiang Manufacturing Certificate



Asian Design Award



Top 100 China Light Industry



Competitive Enterprises of National Intellectual Property



9000



14000



18000



SALES NETWORK

JACK sales network located in more than 100 countries and has more than 5000 sales and service centre.





Supplier: ensure the quality and efficiency from the beginning.




Agent: ensure the service quality for end-user.



Apparel Industry: meet the commands and boost the industry upgrading.

SMART SERVICE

Build more than 5000 quick service centres in the future.

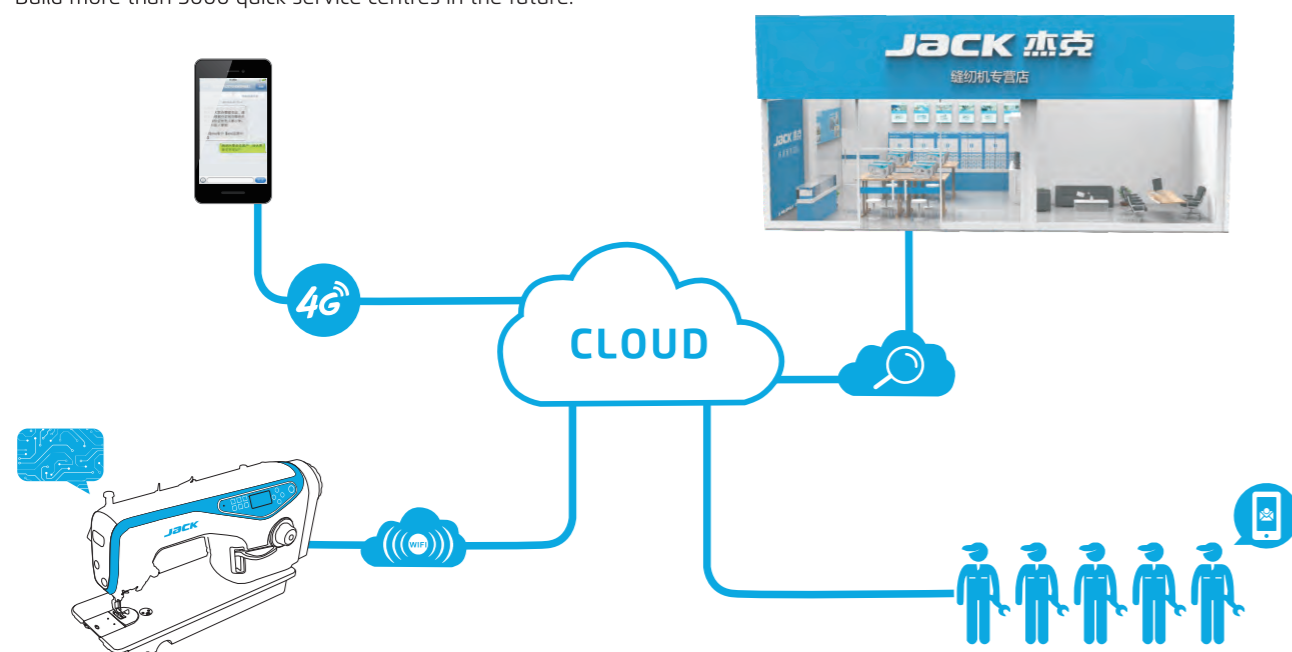

ADVANCED EQUIPMENT: INTELLIGENT PRODUCING LINE

The first intelligent line finishing production by investing 100 million RMB, no need manpower, increase efficiency, improve the product accuracy and ensure the high-quality.



JACK A-SHARE LISTED COMPANY



Successfully listed in Shanghai stock market

PRODUCT LIST

Lockstitch Machine Series

A6F Computerized Needle Feed Lockstitch Machine -----	03
A5 Thread Cleanness Computerized Lockstitch Machine -----	03
A4 Speaking Computerized Lockstitch Machine -----	04
A3 High Speed Computerized Lockstitch Machine -----	05
A2 Automatic Trimmer Lockstitch Machine -----	06
F4 Power Saving Lockstitch Machine -----	07
JK-58450J Computerized Double Needle Lockstitch Machine -----	08
JK-5559G Semi-dry Computerized Lockstitch Machine with Edge Cutter -----	09
JK-8558G Power Saving Chain Stitch Machine -----	10

Overlock Machine Series

C6 Super High Speed Automatic Overlock Machine with Pneumatic Suction Device -----	13
C5 High Speed Automatic Overlock Machine with Pneumatic Suction Device -----	14
C4 High Speed Automatic Overlock Machine -----	15
C3 High Speed Automatic Overlock Machine -----	16
E4 Super High Speed Power Saving Overlock Machine -----	17
JK-800D Power Saving Overlock Machine -----	18
JK-797DI/797TDI Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine -----	19
JK-798TE/798TDI Variable Top Feed Computerized Overlock Machine -----	20

Interlock Machine Series

K4-UT High Speed Computerized Cylinder-bed Interlock Machine -----	23
--	----

W4-UT High Speed Computerized Flat-bed Interlock Machine -----	24
JK-8670BDII-UT High Speed Computerized Small Cylinder-bed Interlock Machine -----	25
JK-8009VCDI Power Saving Multi-needle Machine -----	26

Special Machine Series

M80 Series Programmable Electronic Large-area Pattern Sewing Machine -----	29
JK-T3020 Series Programmable Electronic Pattern Sewing Machine -----	30
JK-T5878-68B/78 Automatic Pocket Welting Machine -----	31
JK-T5878-58BQ Automatic Placket Setting Machine -----	32
JK-T1900G Electronic Bartacking Machine -----	33
JK-T1903GR Electronic Button Attaching Machine -----	34
JK-T1790E Electronic Lockstitch Buttonholing Machine -----	35
JK-T781E Integrated Electronic Lockstitch Buttonholing Machine -----	36
JK-T1377E Integrated Electronic Button Attaching Machine -----	37
JK-T9270D/9280D Direct Drive Feed-off-the Arm Machine -----	38

Heavy-duty Machine Series

JK-2060G Compound Feeding Computerized Lockstitch Machine for Heavy-duty -----	41
JK-2030G Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty -----	42
JK-2001G Long Stitch Length Lockstitch Machine for Heavy-duty -----	43
JK-6380E Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty -----	44

Make the service smarter

Smart service is not only offering on-time after-sales service, but also helping operators to solve the problem with the intelligent human-computer interaction.



Lockstitch Machine Series



A6F

Computerized Needle Feed Lockstitch Machine
Full-automatic; Needle feed; No thread tail; Semi-dry



A5

Thread Cleaness Computerized Lockstitch Machine
Full-automatic; No thread tail; Semi-dry



A4

Speaking Computerized Lockstitch Machine
Full-automatic; Speaking

A6F



Needle feed; Avoid of layers offset

No thread tail


Touchable panel

Large space

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Volume (mm)	Weight (kg)
A6F	DBx1 11-18#	2	4.5	5-13	4000	✓	695x315x670	46/53
A6F-N	DBx1 11-18#	2	4.5	5-13	4000	✓	695x315x670	46/53

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.
N: less bird-nest device, pneumatic and electronic suction device are optional.

A5




Initial sewing without bird nest; Short thread tail after trimming

Semi-dry

Sealed oil pan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Volume (mm)	Weight (kg)
A5	DBx1 11-18#	2	5	5-13	5000	✓	645x248x550	40/46
A5-N	DBx1 11-18#	2	5	5-13	5000	✓	645x248x550	40/46

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.
N: less bird-nest device, pneumatic and electronic suction device are optional.

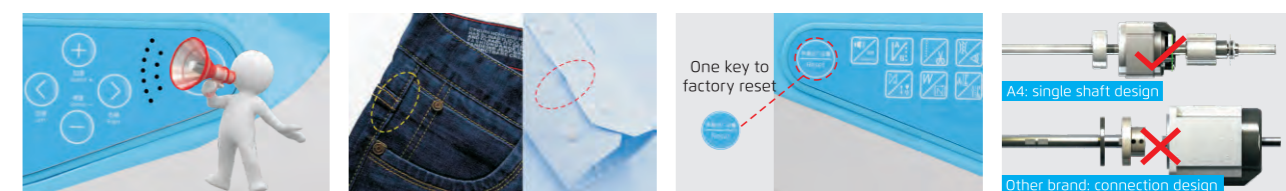

Speaking

Suitable for light and heavy material

Factory reset

Single shaft drive; Stable and fast


Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A4-X	DBx1 11-18#	2	5	5-13	5000	✓		645x248x550	40/46
A4	DBx1 11-18#	2	5	5-13	5000	✓		645x248x550	40/46
A4-H	DPx5 18-21#	2	5	5-13	3500		✓	645x248x550	40/46
A4-7	DBx1 11-18#	2	7	5-13	3500	✓		645x248x550	40/46
A4-H-7	DPx5 18-21#	2	7	5-13	3500		✓	645x248x550	40/46

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.



A3

High Speed Computerized Lockstitch Machine
Auto-trimmer; Auto-reverse

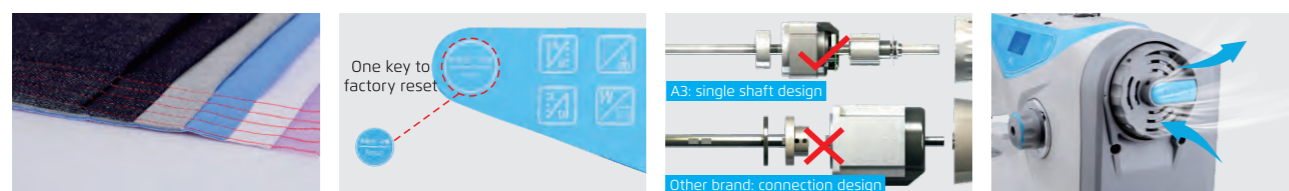

Suitable for light and heavy material

Factory reset

Single shaft drive; Stable and fast

Cooling fan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A3	DBx111-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-H	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-7	DBx111-18#	2	7	5-13	3500	√		645×248×550	40/46
A3-H-7	DPx5 18-21#	2	7	5-13	3500		√	645×248×550	40/46
A3-C	DBx111-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-CH	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-C-7	DBx111-18#	2	7	5-13	3500	√		645×248×550	40/46
A3-CH-7	DPx5 18-21#	2	7	5-13	3500		√	645×248×550	40/46

Note: auto thread trimming, auto reverse, and electronic thread tension are equipped as standard.



A2

Automatic Trimmer Lockstitch Machine
Auto-trimmer



Auto tread trimming

LED light

Cooling fan

Needle position


Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A2-CQ	DBx111-18#	2	5	5-13	4000	√		671×248×550	34/41
A2-CHQ	DPx5 18-21#	2	5	5-13	3500		√	671×248×550	34/41
A2-CQ-7	DBx111-18#	2	7	5-13	3500	√		671×248×550	34/41
A2-CHQ-7	DPx5 18-21#	2	7	5-13	3500		√	671×248×550	34/41

Note: auto thread trimming is equipped as standard.



F4


Power Saving Lockstitch Machine
Power saving



Power saving 71%



Convenient thread cutter



Needle position



LED light

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
F4	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	32/38.7
F4-H	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	32/38.7
F4-7	DBx1 11-18#	2	7	5-13	3500	√		645×248×550	32/38.7
F4-H-7	DPx5 18-21#	2	7	5-13	3500		√	645×248×550	32/38.7
F4-HL-7	DPx5 18-21#	2	7	5-13	3500		√	645×248×550	32/38.7

Note: L: Large hook.




JK-58450J

Computerized Double Needle Lockstitch Machine
Straight cutter; Auto cornering; Large space



For different thickness of thread



Straight knife



Split needle bar



Built-in presser foot lifter

Model	Needle	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Application	Function	Auto Corner Sewing	Large Hook	Volume (mm)	Weight (kg)
JK-58420-003/JK-58420-005	DPx5 11-16#/14-22#	4/5	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	43/53.5
JK-58450-003/JK-58450-005	DPx5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch			725×320×675	43/53.5
JK-58720-003/JK-58720-005	DPx5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch		√	725×320×675	43/53.5
JK-58750-003/JK-58750-005	DPx5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		√	725×320×675	43/53.5
JK-58420J-403E/JK-58420J-405E	DPx5 11-16#/14-22#	4/5	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	53/63
JK-58450J-403E/JK-58450J-405E	DPx5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch			725×320×675	53/63
JK-58450J-413E/JK-58450J-415E	DPx5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch	√		725×320×675	53/63
JK-58720J-403E/JK-58720J-405E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch		√	725×320×675	53/63
JK-58750J-403E/JK-58750J-405E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		√	725×320×675	53/63
JK-58750J-413E/JK-58750J-415E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch	√	√	725×320×675	53/63

Note: 1. E is computerized type: auto thread trimming, auto reverse, auto presser foot lifter, auto thread whipping are equipped as standard.

Electronic thread tension is optional. Straight stitch: 103/105; Corner stitch: 103/105/113/115.

2. Optional needle gauge: 1/8 (3.2), 5/32 (4.0), 3/16 (4.8), 1.4 (6.4), 5/16 (7.9), 3/8 (9.5), 7/16 (11.1), 1/2 (12.7), 5/8 (15.9), 7/8 (22.2), 1 (25.4).



JK-5559G

Semi-dry Computerized Lockstitch Machine with Edge Cutter
Semi-dry; Single shaft drive



Edge cutter and tape binder
(JK-5558G-T)

Semi-dry

Large space

Single shaft drive; Stable and fast


Model	Needle	Thread No.	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium Heavy Duty	Volume (mm)	Weight (kg)
JK-5559G-W	DBx1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	40/46
JK-5558G-W	DBx1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7
JK-5558G	DBx1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7
JK-5558G-WT	DBx1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7
JK-5558G-T	DBx1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7

Note: 1. JK-5559G-W is computerized, semi-dry, auto presser foot lifter, electronic thread tension are equipped as standard.
2. JK-5558G is direct drive type;
3. W: dry head; T: with fabric edge cutter and tape binder.



JK-8558G

Power Saving Chain Stitch Machine
Power saving

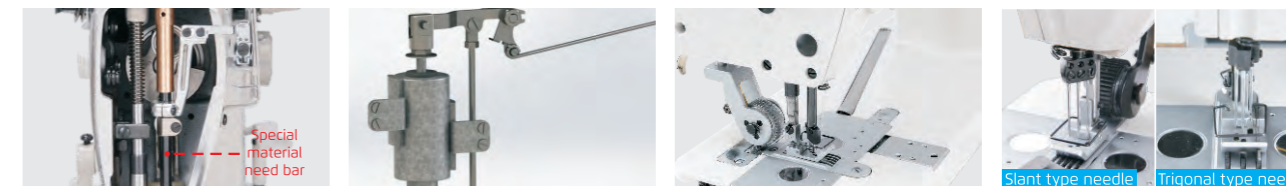

Semi-dry


Auto presser foot lifter

Rear puller

Two needle gauges (JK-8560G)

Model	Needle Array	Needle Gauge	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	Light Material	Medium Heavy Duty	Heavy Duty	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47
JK-8558G-1WZ	Single Needle	-	TVx7 14#	1	2	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47
JK-8560G-WZ	Slant Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47
JK-8560G-WZ-PL	Slant Three Needle	1/8	TVx7 18#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47
JK-8560G-PHWZ	Trigonal Three Needle	1/8	TVx7 21#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√	4000	675×275×595	39/47

Note: PL: rear puller; JK-8558G/8560G: auto presser foot lifter is optional the parameter of JK-8558WD/8560WD is the same with JK-8558G/8560G.



Make the service smarter

Smart service is not only trouble shooting
but also preventing the problems happening
by the intelligent pre-warning system.

Overlock Machine Series



C6

Super High Speed Automatic Overlock Machine with Pneumatic Suction Device
Full-automatic; Pneumatic device; Oil proof and durable



High efficiency



Clean sewing



Oil free



Touchable panel


Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C6-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7500	582x360x640	35/48
C6-3-02/233/KS	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	6	7500	582x360x640	35/48
C6-3-12/233/KS	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-3-32R2/223/KS	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-WF-3-02/213	Non-woven Material	DCx27 14#	1	3	-	4	8.5	-	5	7000	582x360x640	35/48
C6-4-M03/333/KS	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7500	582x360x640	35/48
C6-4-M03/333/H/M/KS	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6.5	7500	582x360x640	35/48
C6-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-5-03/233/KH	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	6	7500	582x360x640	35/48
C6-5-03/333/KH	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	6	7500	582x360x640	35/48
C6-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7500	582x360x640	35/48
C6-6-03/333/KH	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	6	7500	582x360x640	35/48

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material; PP: rear puller (optional); W: dry head (optional).



C5

High Speed Automatic Overlock Machine with Pneumatic Suction Device
Full-automatic; Pneumatic device; Oil proof



Super short thread tail



Clean sewing



Voice guide; One key to reset



Intelligent recognition of fabric thickness


Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C5-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525x360x640	33/44
C5-3-02/233/KS	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x640	33/44
C5-3-12/233/KS	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x640	33/44
C5-3-32R2/223/KS	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525x360x640	33/44
C5-WF-3-02/213	Non-woven Material	DCx27 14#	1	3	-	4	8.5	-	5	7000	525x360x640	33/44
C5-4-M03/333/KS	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x640	33/44
C5-4-M03/333/H/M/KS	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x640	33/44
C5-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5	7000	525x360x640	33/44
C5-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x640	33/44
C5-5-03/233/KH	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	7000	525x360x640	33/44
C5-5-03/333/KH	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x640	33/44
C5-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x640	33/44
C5-6-03/333/KH	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	5	7000	525x360x640	33/44

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material.




C4

High Speed Automatic Overlock Machine
Full-automatic; Electronic device; Oil-proof; Voice guide



High efficiency

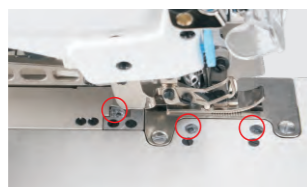

Intelligent recognition of fabric thickness



Voice guide; One key to reset



Available to narrow and wide edge

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C4-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525x360x510	33/41
C4-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-12/233	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-32R2/223	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-WF-3-02/213	Non-woven Fabric	DCx27 14#	1	3	-	4	8.5	-	5	7000	525x360x510	33/41
C4-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x510	33/41
C4-4-M03/333/AD	Adjustable Side Stitch Width	DCx27 11#	2	4	2	4-8	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	33/41
C4-6-03/333	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	5	7000	525x360x510	33/41

Note: H/M: suitable for heavy and medium material. SD device is available (start and end suction device); volume: 525x360x640 (mm), weight 33/44 (kg).



C3

High Speed Automatic Overlock Machine
Auto-trimmer; Auto presser foot lifter; Oil-proof




Auto tread trimming



Oil-proof needle bar



One key to reset



Single shaft drive; Stable and fast


Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C3-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	5800	525x360x510	30/38
C3-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	5800	525x360x510	30/38
C3-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	5800	525x360x510	30/38
C3-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	5800	525x360x510	30/38
C3-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	5800	525x360x510	30/38
C3-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	5800	525x360x510	30/38

Note: H/M: suitable for heavy and medium material.



E4

Super High Speed Power Saving Overlock Machine
Power saving; Oil-proof




Suitable for light and heavy material



Oil-proof needle bar



Easy to operate




Single shaft drive; Stable and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4-2	Fabric Joint Sewing	DCx27 11#	1	2	-	6	3.8	0.7-2	3.5	5500	525x360x510	28/36
E4-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	5500	525x360x510	28/36
E4-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-3-82/233	Back Latching	DCx27 11#	1	3	-	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-3-12/233	Blindstitch Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-3-32R2/223	Baby Overlock Stitch	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5	5500	525x360x510	28/36
E4-WF-3-02/213	Non-woven Material	DCx27 14#	1	3	-	4	8.5	-	5	5500	525x360x510	28/36
E4-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	5500	525x360x510	28/36
E4-4-83/323	Back Latching	DCx27 11#	2	4	2	4	4.2	0.7-2	5.5	5500	525x360x510	28/36
E4-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	5500	525x360x510	28/36
E4-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-5-02A/233	Light Material	DCx27 11#	2	5	3	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	5500	525x360x510	28/36
E4-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	5500	525x360x510	28/36
E4-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	5500	525x360x510	28/36
E4-6-03/333	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	5	5500	525x360x510	28/36



JK-800D


Power Saving Overlock Machine
No oil leakage



Power saving 71%



High speed and adjustable



No oil leakage



LED light

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Needle Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-803D-M1-15	9#	1	3	-	1.5	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
JK-803D-M2-04	11#	1	3	-	4	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
JK-803D-M5-04/BK	11#	1	3	-	4	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
JK-804D-M2-24	11#	2	4	2	4	4.2	0.7-2	5.5	6000	500x360x500	28.5/36.5
JK-804D-M5-23/BK	11#	2	4	2	3	4.2	0.7-2	5.5	6000	500x360x500	28.5/36.5
JK-805D-M2-35	14#	2	5	3	5	4	0.7-2	5	5500	500x360x500	28.5/36.5
JK-805D-M2-55	14#	2	5	5	5	4	0.7-2	5	5500	500x360x500	28.5/36.5
JK-805Dx2-56	19#	2	5	5	6	4.2	0.7-1.4	6	5500	500x360x500	28.5/36.5

The specification of JK-800 series is the same as JK-800D series.



JK-797TDI

Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine
Power saving; Small cylinder; Variable top feed



148mm cylinder bed

Differential feeding;
Avoid of layers offset

Automatic extension device;
Stable and high efficiency

One machine with multifunctions


Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-797TDI-3-504-02/233N	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465x360x485	271/34.5
JK-797TDI-3-504-02/233N/FR01	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465x360x485	271/34.5
JK-797TDI-3-504-02/233N/FR02	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465x360x485	271/34.5
JK-797TDI-3-504-02/233N/KS/FR01	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465x360x485	271/34.5
JK-797TDI-3-504-02/233N/KS/FR02	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465x360x485	271/34.5
JK-797TDI-4-514-M03/333	DCx27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	271/34.5
JK-797TDI-4-514-M03/333/FR01	DCx27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	271/34.5
JK-797TDI-4-514-M03/333/FR02	DCx27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	271/34.5
JK-797TDI-4-514-M03/333/KS/FR01	DCx27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	271/34.5
JK-797TDI-4-514-M03/333/KS/FR02	DCx27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	271/34.5

Note: 1. The parameters of small cylinder bed JK-797DI series are the same with above parameters.
2. KS: pneumatic type (verticl), FR01: automatic extension device, FR02: mechanical extension device.



JK-798TE

Variable Top Feed Computerized Overlock Machine
Variable top feed; 798TE: automatic; 798TDI: power saving

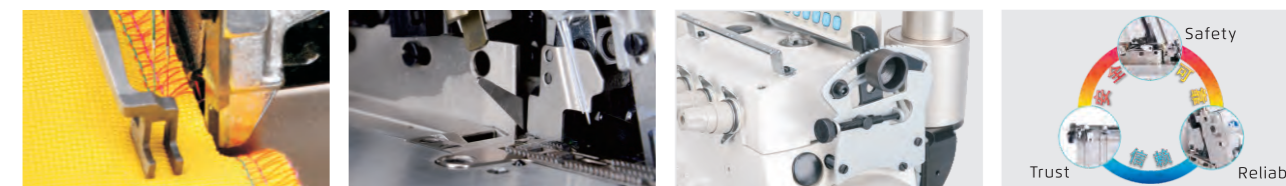

Differential feeding;
Avoid of layers offset

Auto thread trimming

Easy to adjust differential ratio

100% safety device

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-798TE-4-514-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	505x360x565	29.2/39.8
JK-798TE-4-514-A04/435	Extra Heavy Duty	DCx27 14#	2	4	2	4	7	0.8-1.5	6	6500	505x360x565	29.2/39.8
JK-798TE-5-516-M03/333	5x5 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798TE-5-516-M03/233	3x4 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798TE-5-516-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	6500	505x360x565	29.2/39.8

Note: super high speed direct drive overlock with differential ratio: JK-798TDI series.

Make the service smarter

Smart service is not only helping you to develop one quick-responding technician team, but also making the technician resources sharing possible by intelligent interaction platform.



Interlock Machine Series



K4-D



K4-UT

High Speed Computerized Cylinder-bed Interlock Machine
Full-automatic; Multi-functional; Stable



Auto thread trimming



Form light to heavy material



Voice guide; Easy to learn and use



Four-in-one sewing bed



Tape binding



Covering stitch



Bottom hemming



Sewing bed extension device

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
K4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-35AC	Bottom Hemming (left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65
K4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-35AC	Bottom Hemming (left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	47/59

Note: UT: computerized, D: direct drive.



W4-D



W4-UT

High Speed Computerized Flat-bed Interlock Machine
Full-automatic; Multifunctional; Stable



Auto thread trimming




From light to heavy material



Cylinder bed; Easy to feed



Four-in-one sewing bed




Tape binding



Covering stitch



Bottom hemming

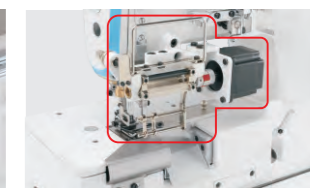

Cylinder bed; Easy to feed

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
W4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
W4-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	5500	670×445×595	48/58
W4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-23GB	Plain Seaming (large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT: computerized, D: direct drive.



JK-8670BDII-UT

High Speed Computerized Small Cylinder-bed Interlock Machine
Small cylinder; Full-automatic



Small cylinder


Auto thread trimming

Out-moved thread cam

Cooling fan

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-8670BD II-01CB/UT	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-03FB/UT	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-03GB/UT	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-08AC/UT	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-08BC/UT	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD I-01CB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-03FB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-08AC	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-08BC	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54

Note: UT: computerized, D: direct drive.

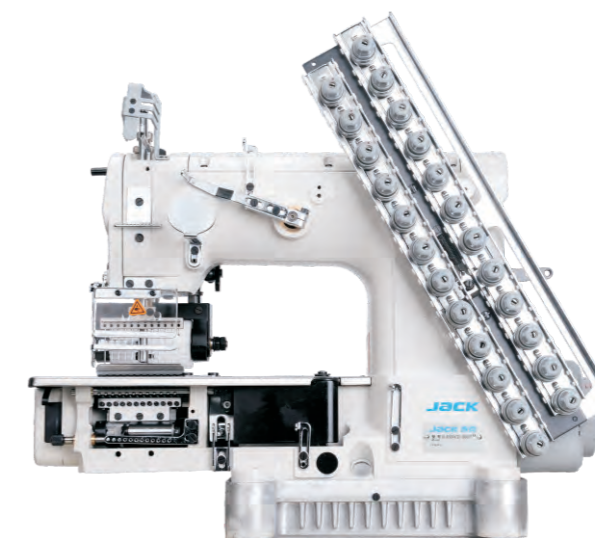

JK-8009VCDI

Power Saving Multi-needle Machine
Power-saving; Wide applications



Elastic attaching

Tape attaching

Shirt-fronting

Waist band

Model	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)
JK-8009HFD I-04064-254P	TVx5 19-21#	4	8	1.7-4.0	1/4"-1-1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04064P	Uo113 14-16#	4	8	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04080P	Uo113 14-16#	4	8	1.7-4.0	5/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04085P	Uo113 14-16#	4	8	1.7-4.0	11/32"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04095P	Uo113 14-16#	4	8	1.7-4.0	3/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06048P	Uo113 14-16#	6	12	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06064P	Uo113 14-16#	6	12	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06080P	Uo113 14-16#	6	12	1.7-4.0	5/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06095P	Uo113 14-16#	6	12	1.7-4.0	3/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08032P	Uo113 14-16#	8	16	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08048P	Uo113 14-16#	8	16	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08064P	Uo113 14-16#	8	16	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08085P	Uo113 14-16#	8	16	1.7-4.0	11/32"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12032P	Uo113 14-16#	12	24	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12048P	Uo113 14-16#	12	24	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12064P	Uo113 14-16#	12	24	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-13064-32P	Uo113 14-16#	13	26	1.7-4.0	1/4" -1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-17032P	Uo113 14-16#	17	34	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-23032P	Uo113 14-16#	23	46	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-25032P	Uo113 14-16#	25	50	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5

Optional device: P (gear puller), PR (flat puller), VWL (front elastic feeding), VPL (tape attaching), VSF (shirt fronting), VPQ (elastic thread shirring).




Special Machine Series



M80 Series

Programmable Electronic Large-area Pattern Sewing Machine
Intelligent; Standard; High efficiency

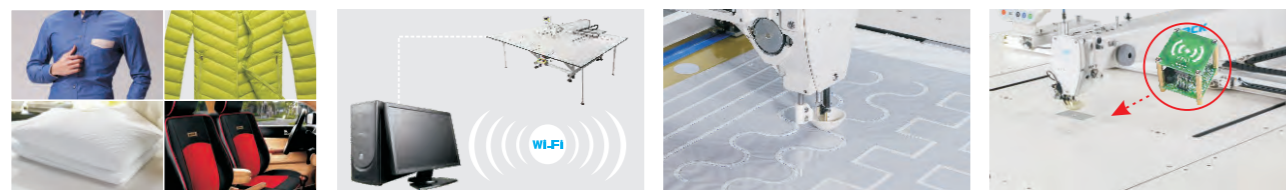

Wide range of application

Wifi remote control

Intelligent central presser foot

Intelligent recognition of patterns

Model	Application	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Mid-presser Foot Lifting Height (mm)	Needle Gauge (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
M80B	Plain Seaming	DP×5 7-16#	1	2	1200×760	17	1-5	2800	2300×1000×1400	406/502
M90	Plain Seaming	DP×5 7-16#	1	2	1400×850	17	1-5	3000	2300×1200×1400	646/742

Note: optional additional devices; A: automatic shuttle exchange; F11: laser cutting; F12:double screen display; F13: bottom line detection; F14: automatic template exchange; F15: revolving knife; F16:point pen device.



JK-T3020 Series

Programmable Electronic Pattern Sewing Machine
Full-automatic; Programmable



Wide range of application


Intelligent central presser foot

For heavy duty

Visual operation


Model	Optional Device	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1310	F1	DP×17 11-25#	1	2	130×100	22	2700	1220×840×1320	140/190
JK-T2210	F1,F3,K	DP×17 11-25#	1	2	200×100	22	2700	1220×840×1320	136/186
JK-T3020	K,TDB	DP×17 11-25#	1	2	300×200	22	2700	1220×1220×1320	222/288
JK-T6040	-	DP×17 11-25#	1	2	600×400	22	2300	1920×1620×1440	343/479
JK-T10040	-	DP×17 11-25#	1	2	1000×400	22	2300	1920×1620×1440	352/488

Note: F1: flip presser foot, F3: sideslip presser foot, K: clamping device, TDB: pocket attaching.

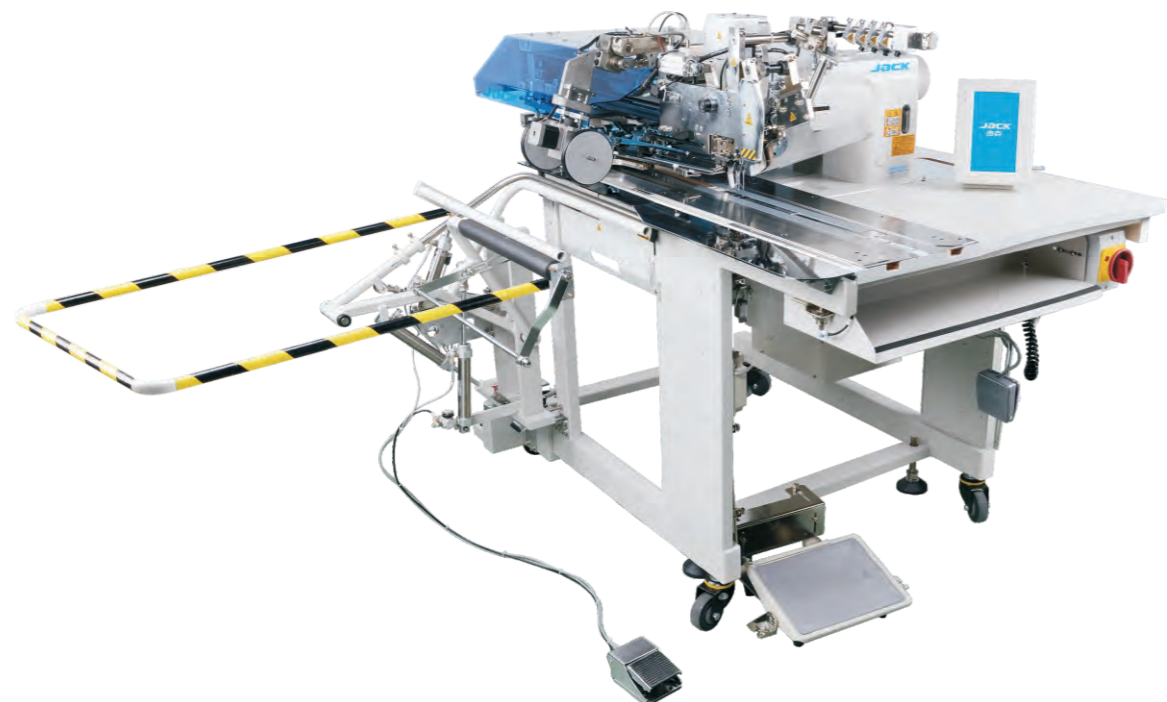

JK-T5878-68B/78

Automatic Pocket Welting Machine
Full-automatic; Programmable

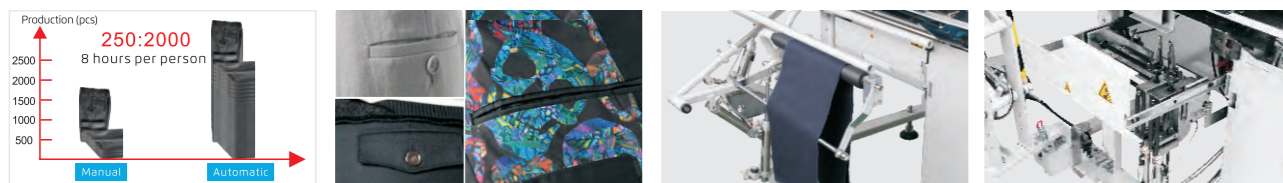

High output

For different kinds of pocket

Automatic collective device


Easy to adjust; Precisely cutting

Model	Application	Needle	Stitch No.	Thread No.	Needle Gauge (mm)	Pocket Size (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-68B	Straight Pocket	MTx190 14#-18#	2	3	8-20	18-220	3000	1600×1100×1500	240/350
JK-T5878-78	Slant Pocket	DPx17 14#-18#	2	3	8-20	18-220	3000	1600×1100×1500	240/350



JK-T5878-58BQ

Automatic Placket Setting Machine
Full-automatic; Programmable

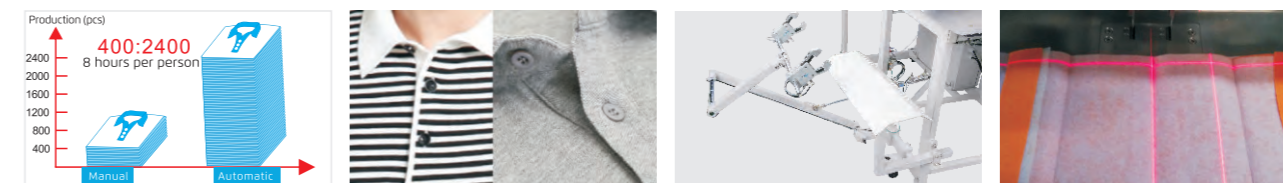

High output

For different kinds of placket

Automatic collective


Laser positioning

Model	Application	Needle	Stitch No.	Thread No.	Sewing Width (mm)	Sewing Length (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-58BQ	T-shirt Placket	DBx111#	1	2	1-50	15-260	4000	2060×1060×1570	200/300



JK-T1900G

Electronic Bartacking Machine
Full-automatic; Programmable; Bartacking & buttonholing

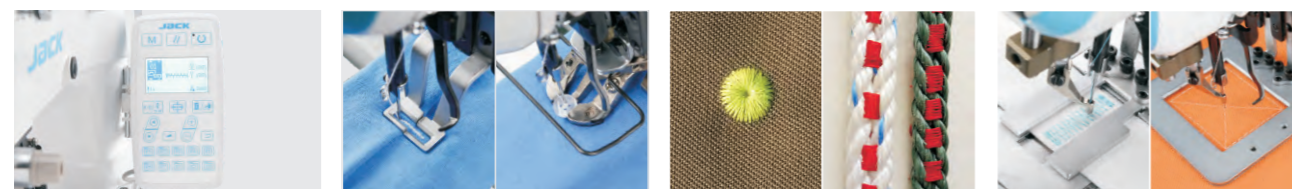

Visual operation Bartacking & buttonholing; Easy shift Cap hole Fishing nets Elastic joint 5x6 pattern


Model	Application	Needle	Stitch No.	Thread No.	X Direction Sewing Range (mm)	Y Direction Sewing Range (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1900GS	Light/Medium Material	DPx5 16#	1	2	40	30	13	3200	805x405x520	55/61
JK-T1900GH	Heavy Duty	DPx17 19#	1	2	40	30	13	3200	805x405x520	55/61
JK-T1900GM	Knitting Material	DPx5 11#	1	2	40	30	13	3200	805x405x520	55/61
JK-T1900GX	Pattern Sewing	DPx5 16#	1	2	40	30	13	2700	805x405x520	55/61
JK-T1900GY	Cap Hole	DPx5 16#	1	2	40	30	13	2700	805x405x520	55/61
JK-T1900GN	Fishing Nets	DPx17 19#	1	2	40	30	13	2700	805x405x520	55/61
JK-T1900GL	Bartacking for Socks	DPx17 14#	1	2	40	35	13	2700	805x405x520	55/61
JK-T1906GS	Pattern Sewing	DPx17 14#	1	2	60	50	10	2700	805x405x520	55/61
JK-T1906GP	Elastic Joint	DPx17 14#	1	2	60	50	10	2700	805x405x520	55/61

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.



JK-T1903GR

Electronic Button Attaching Machine
Automatic button feeding

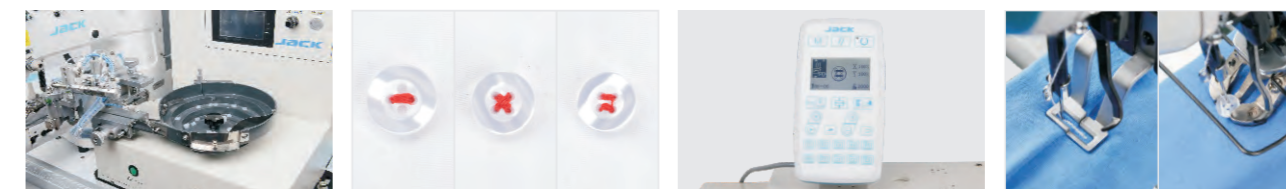

Automatic button feeding Wide range of application Easy to operate One machine with multi-functions


Model	Application	Needle	Stitch	Thread	Button Diameter (mm)	Button Size (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1903G	Basic	DPx17 14#	1	2	Φ8-Φ30	X:2.4-6.8 Y:2.4-6.8	10	2700	805x405x520	55/61
JK-T1903GR	Automatic Button Sending	DPx17 14#	1	2	Φ9-Φ22	X:2.4-6.8 Y:2.4-6.8	13	2700	1070x870x1390	135/160

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.



JK-T1790E

Electronic Lockstitch Buttonholing Machine
Full-automatic; Programmable

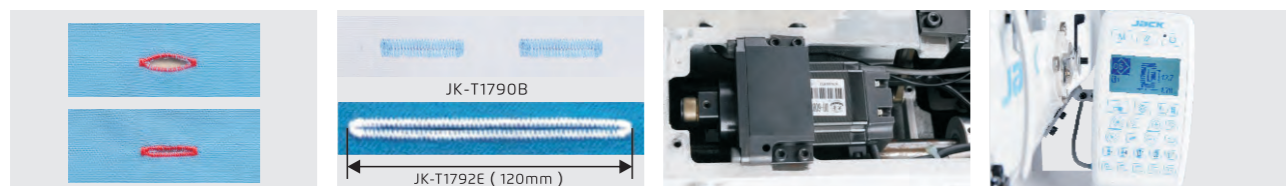

Basting stitch before sewing

Continuously sewing (JK-T1790B)

Cutter driven by servo motor

Visual operation

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Thread No.	Parallel Interspace (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T1790ES-1-D	Woven Material	25x4	DPx5 12#	1	1/4"~3/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1790ES-2-D	Woven Material	35x5	DPx5 12#	1	1/4"~1"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1790ES-3-D	Woven Material	41x5	DPx5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1791ES-D	Woven Material	70x5	DPx5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1792ES-D	Woven Material	120x5	DPx5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1790EK-1-D	Knitting Material	25x4	DPx5KN 11#	1	1/4"~3/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1790EK-2-D	Knitting Material	35x5	DPx5KN 11#	1	1/4"~1"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1790EK-3-D	Knitting Material	41x5	DPx5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1791EK-D	Knitting Material	70x5	DPx5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80
JK-T1792EK-D	Knitting Material	120x5	DPx5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880x390x635	65/80

Note: auto presser foot lifter, auto thread trimming are equipped as standard; continuously sewing is special function of JK-1790B serial machines.



JK-T781E

Integrated Electronic Lockstitch Buttonholing Machine
Auto presser foot lifter; Automatic



Auto thread trimming;
Auto presser foot lifter

Power saving 70%

Easy to operate

Cooling fan

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Needle No.	Column Width (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T781D-Q	Woven Material	22x4	DPx5 12#	1	1/4"~3/4"	2	0.2-2.5			12	3600	695x340x725	41/61
JK-T782D-Q	Woven Material	33x5	DPx5 12#	1	1/4"~1"	2	0.2-2.5			12	3600	695x340x725	41/61
JK-T783D-Q	Woven Material	40x5	DPx5 12#	1	1/4"~1 1/4"	2	0.2-2.5			12	3600	695x340x725	41/61
JK-T781DK-Q	Knitting Material	22x4	DPx5 12#	1	1/4"~3/4"	2	0.2-2.5			12	3600	695x340x725	41/61
JK-T781E-Q	Woven Material	22x4	DPx5 12#	1	1/4"~3/4"	2	0.2-2.5	✓	✓	12	3600	685x365x685	46/66
JK-T782E-Q	Woven Material	33x5	DPx5 12#	1	1/4"~1"	2	0.2-2.5	✓	✓	12	3600	685x365x685	46/66
JK-T783E-Q	Woven Material	40x5	DPx5 12#	1	1/4"~1 1/4"	2	0.2-2.5	✓	✓	12	3600	685x365x685	46/66
JK-T781EK-Q	Knitting Material	22x4	DPx5 12#	1	1/4"~3/4"	2	0.2-2.5	✓	✓	12	3600	685x365x685	46/66



JK-T1377E

Integrated Electronic Button Attaching Machine
Automatic; Easy shift



Three patterns

Easy shift Patterns

Auto presser foot lifter


WP auto thread wiping device (optional)

Model	Needle	Stitch No.	Thread No.	Button Diameter (mm)	Button Hole Size (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Direct Drive, Integrated	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1377	TQ×7 16# TQ×1 16#	1	1	10-28	X (2.5~6.5) Y (0 , 2.5~4.5)	√	√		9	1500	570×435×420	23/28
JK-T1377E	TQ×7 16# TQ×1 16#	1	1	10-28	X (2.5~6.5) Y (0 , 2.5~4.5)	√	√	√	9	1500	620×460×430	28.5/34.5



JK-T9270D/9280D

Direct Drive Feed-off-the Arm Machine
Power saving

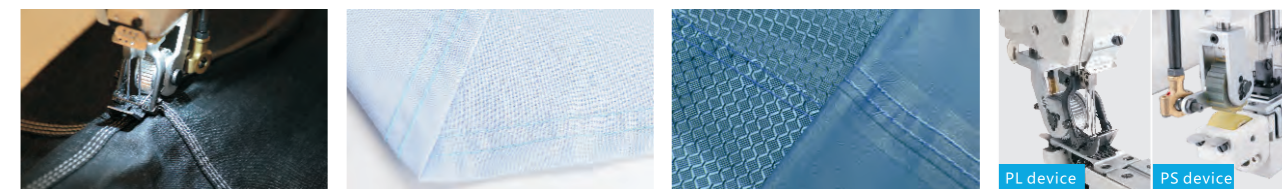

Jeans

Shirt

Raincoat

Optional pullers

Model	Needle Gauge	Needle	Stitch No.	Thread No.	Needle Distance (mm)	Presser Foot Lifting Height (mm)	Light Material	Medium Material	Heavy Duty	Heavier Duty	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T9270D-12-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	56/60
JK-T9270D-12-2PL-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	56/60
JK-T9270D-12-2PS-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	56/60
JK-T9270D-12-2PL-Q	3/16	TV×64 12#	2	4	4.2	8	√				3500	685×535×475	56/60
JK-T9270D-13-Q	1/8	TV×64 12#	3	6	3.5	8	√				3500	685×535×475	56/60
JK-T9270D-13-2PL-Q	1/8	TV×64 12#	3	6	3.5	8	√				3500	685×535×475	56/60
JK-T9270D-22-Q	1/4,3/16	TV×64 14#	2	4	3.5	8		√			3500	685×535×475	56/60
JK-T9280D-53-Q	1/8	TV×5 21#	3	6	4.2	10			√		3500	685×535×475	56/60
JK-T9280D-73-2PL-Q	1/8	TV×5 21#	3	6	4.2	10				√	3500	685×535×475	56/60
JK-T9280D-73-PL-Q	1/8	TV×5 21#	3	6	4.2	10				√	3500	685×535×475	56/60
JK-T9280D-73-PS-Q	1/8	TV×5 21#	3	6	4.2	10				√	3500	685×535×475	56/60

Note: PL: rear puller; PS: box puller; JK-T9270D-12-2PL-Q needle gauge is 4.2mm for sewing raincoats.




Heavy-duty Machine Series



JK-2060G

Compound Feeding Computerized Lockstitch Machine for Heavy-duty
Full-automatic; Compound feeding; Large space

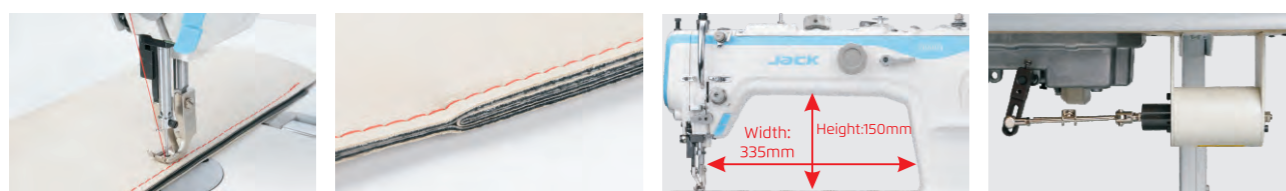

Compound feeding

For 8 layers of leather

Large space


Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2060GHC-3Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓		785×320×605	43/53
JK-2060GHC-4Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785×320×605	43/53



JK-2030G

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty
Full-automatic; Top and bottom feeding; Large space

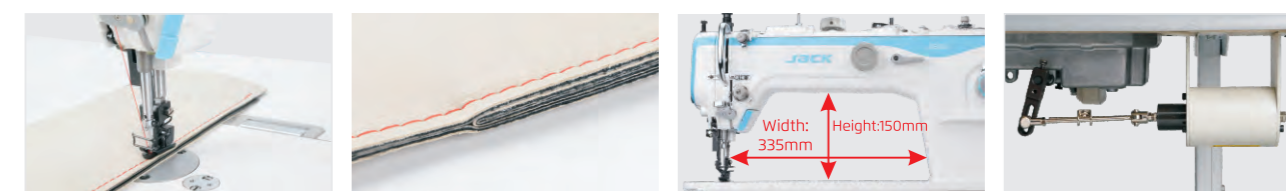

Top and bottom feeding

For 8 layers of leather

Large space

Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2030GHC-3Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓		785×320×605	43/53
JK-2030GHC-4Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785×320×605	43/53



JK-2001G

Long Stitch Length Lockstitch Machine for Heavy-duty
Auto-trimmer; Stitch length 12mm



For heavy duty



Big stitch length



Large hook



One key to reset

Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Volume (mm)	Weight (kg)
JK-2001GHC-3Q	Tent, Curtains, Bedding, Disposable Slippers	DPx17	20-23 #	1	2	1-12	-	8/16	3000	✓	✓	✓	✓	680×255×550 38/42



JK-6380E

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty
Top and bottom feeding; Full-automatic



For heavy duty



Sealed lifter shaft of presser foot



Auto presser foot lifter




Direct drive; Power saving


Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-6380EHC-3Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	8/16	2000	✓	✓	✓	✓		680×255×550	38/42
JK-6380EHC-4Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	8/16	2000	✓	✓	✓	✓	✓	680×325×550	41/45
JK-6380EHC-3TQ	Gloves, Handbag Etc. Leather, Nonwoven Fabrics	DPx17 14#	1	2	1-8	3.5-5.5	8/16	1800	✓	✓	✓	✓		680×255×550	38/42
JK-6380BC-Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	8/16	2000				✓		605×255×550	31/38
JK-6380BC-Q-12	Sofa, Car Seat, Luggage, Tent, Curtain	DPx17 20-23#	1	2	1-12	3.5-5.5	8/16	2000				✓		605×255×550	31/38
JK-6380C	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	8/16	2000						605×255×550	31/38
JK-6380C-12	Sofa, Car Seat, Luggage, Tent, Curtain	DPx17 20-23#	1	2	1-12	3.5-5.5	8/16	2000						605×255×550	31/38

CONFIGURATION


Shirt

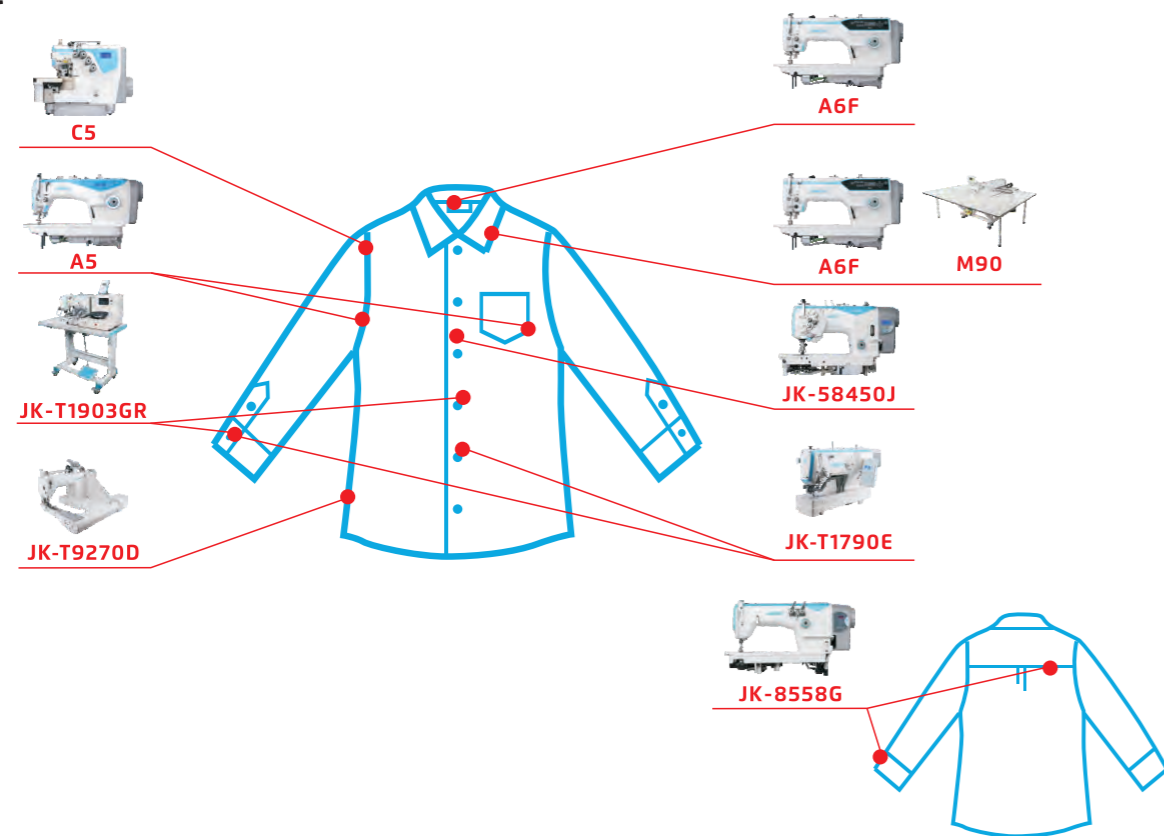


Jeans

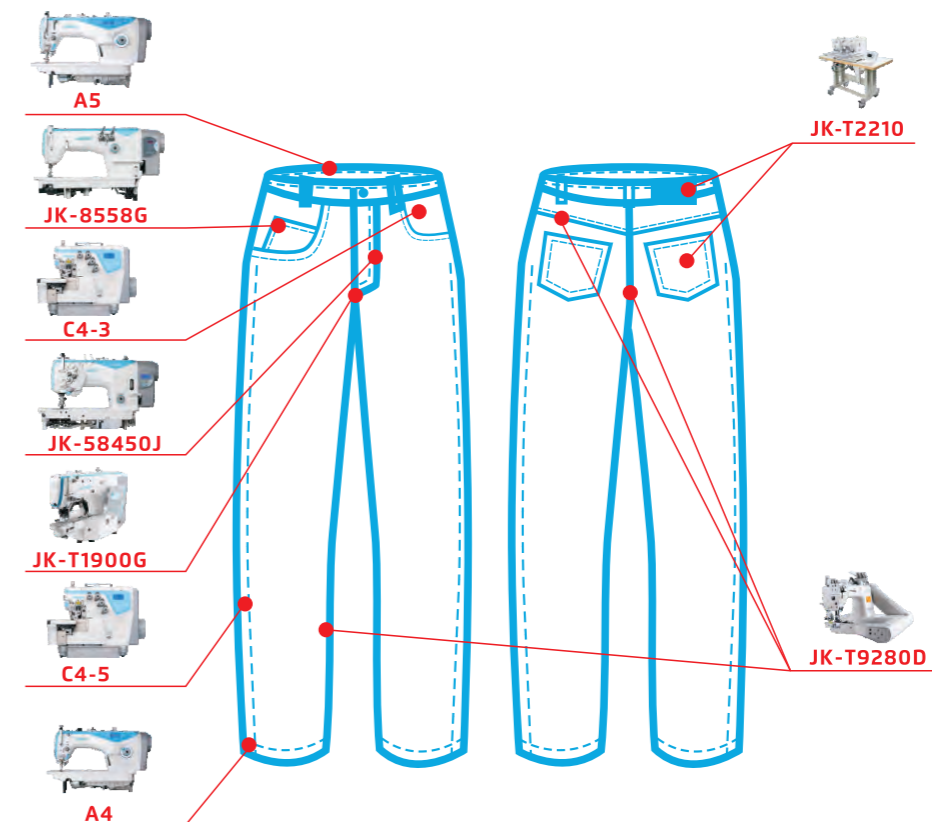


Trousers

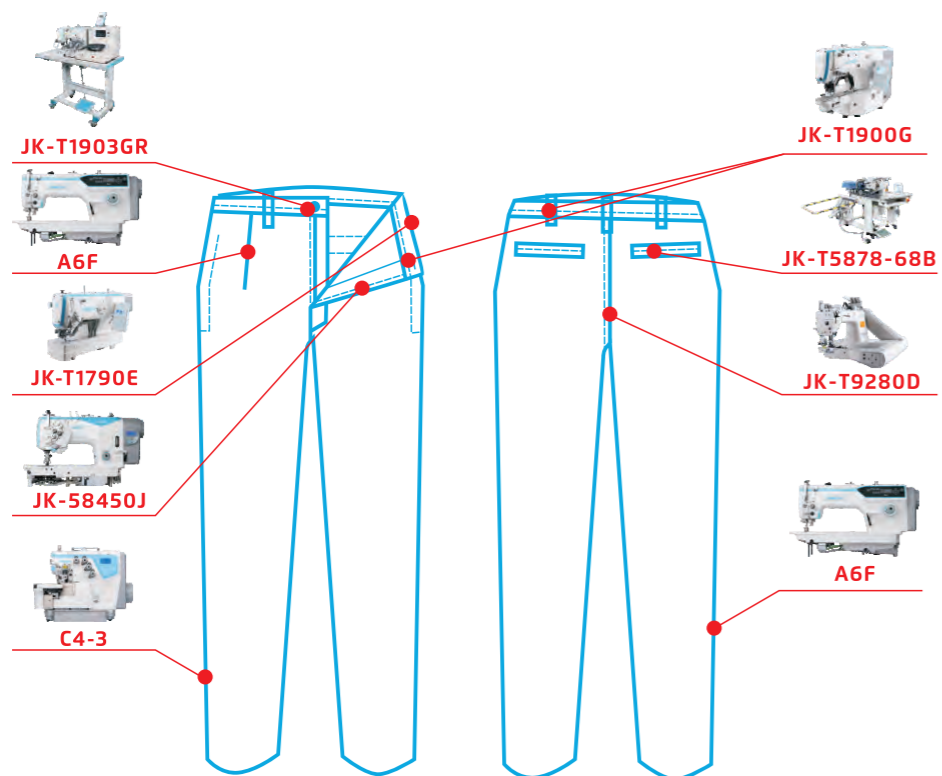


Bra

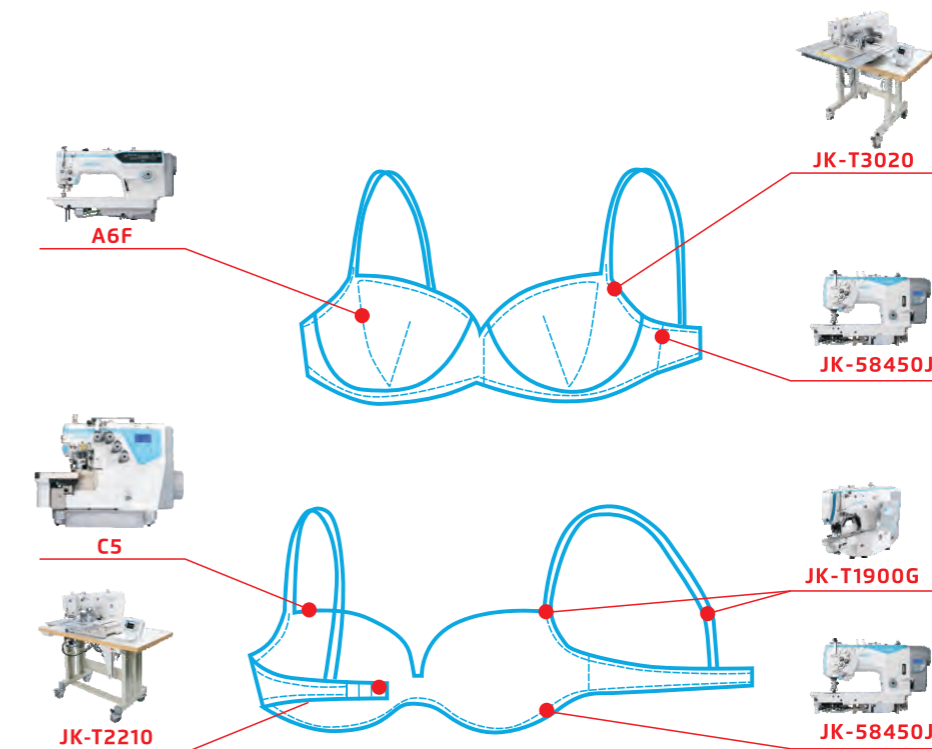


Briefs

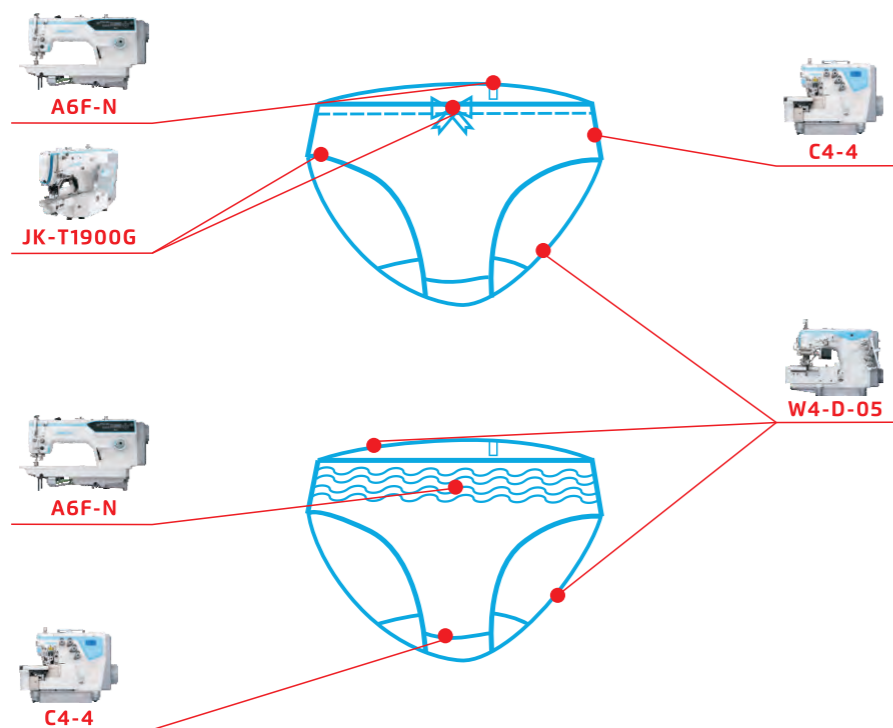


Dresses

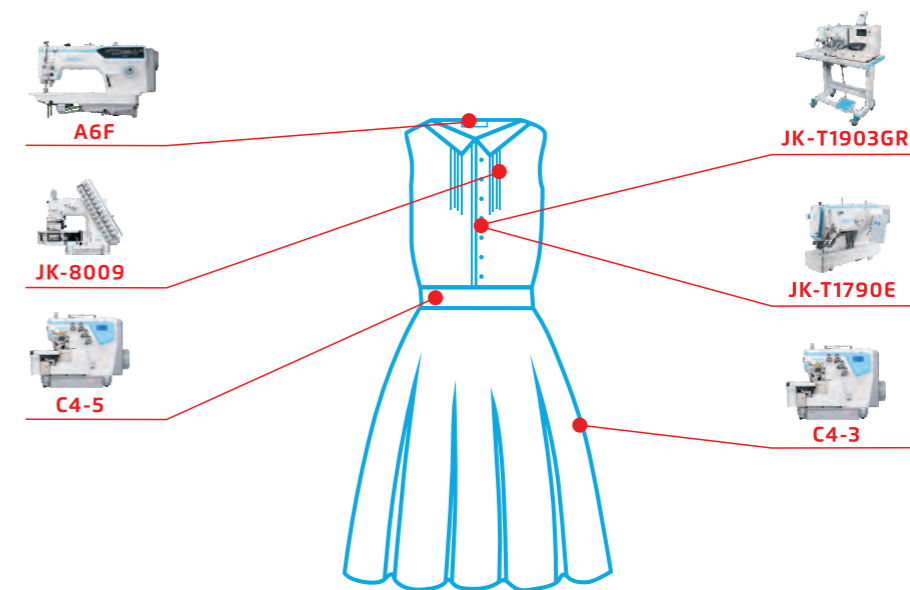

Polo-shirt

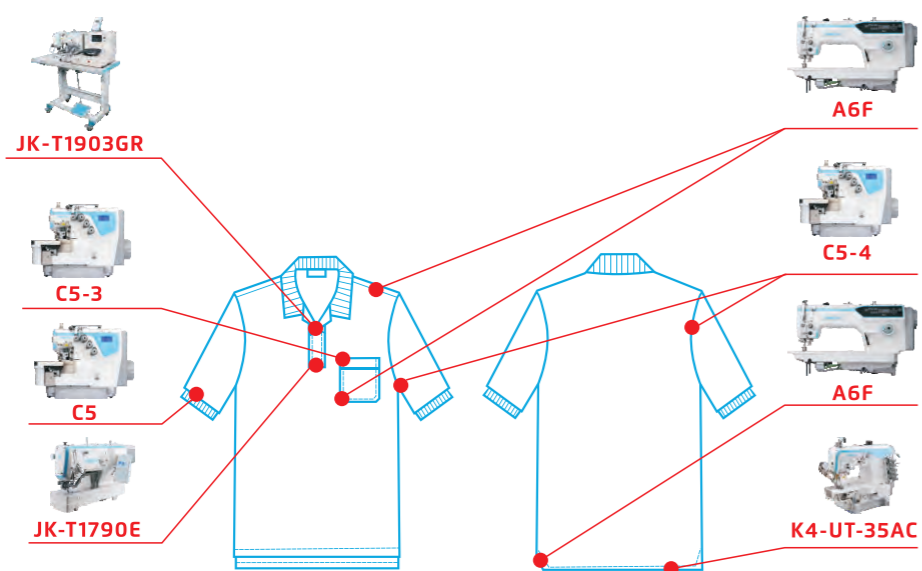

Bag

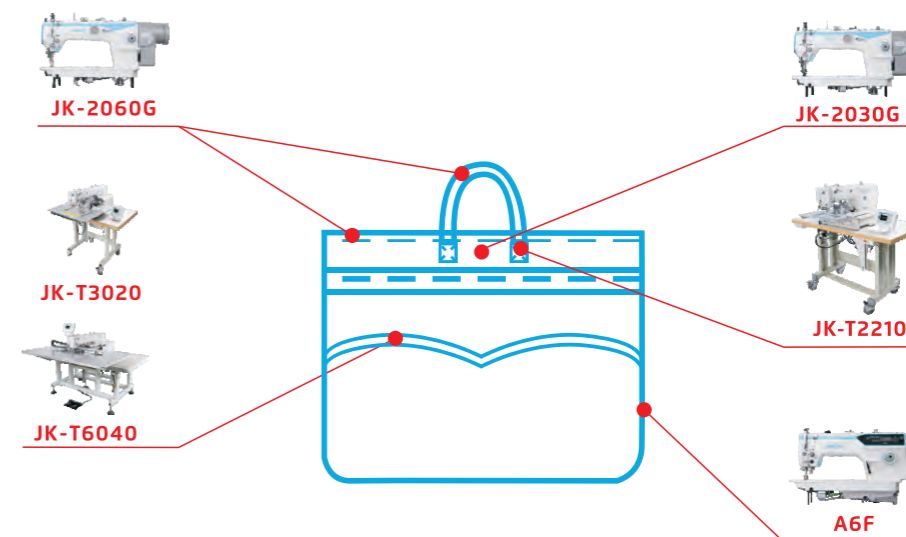


STITCH TABLE


Lockstitch




Lockstitch with short thread tail
P03

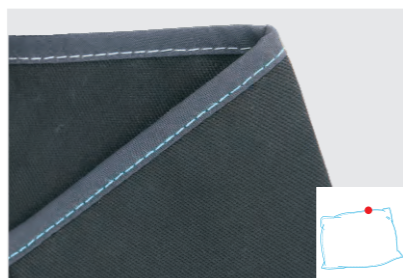


Edge cut and tape binder
P09

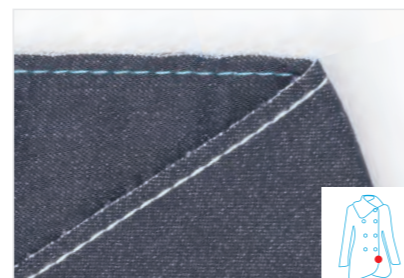


Cutting after sewing
P09

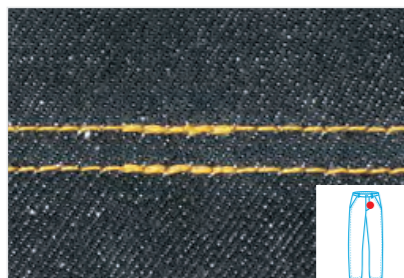


Double needle straight stitch
P08

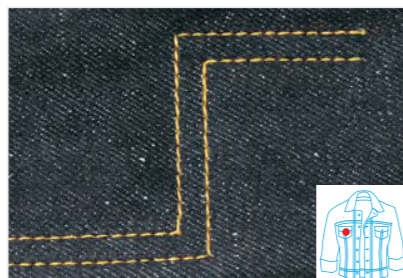

Double needle corner stitch
P08

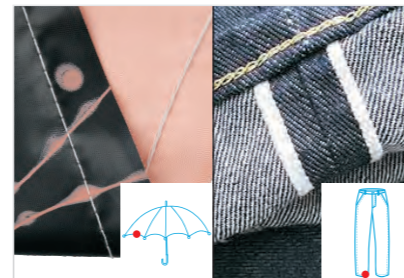

Single needle chain stitch
P10

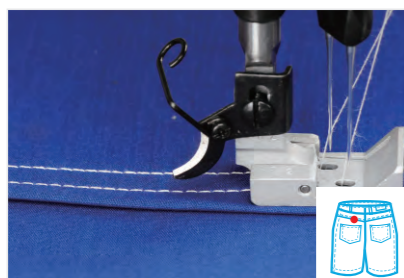

Double needle chain stitch
P10



Triple needle chain stitch
P10



Heavy duty
P39-42


Overlock




Pocket double chain rolling stitch
P15



Fabric joint sewing
P17

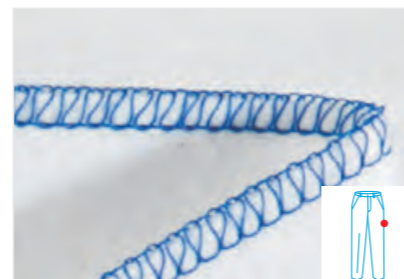


Three threads stitch
P15

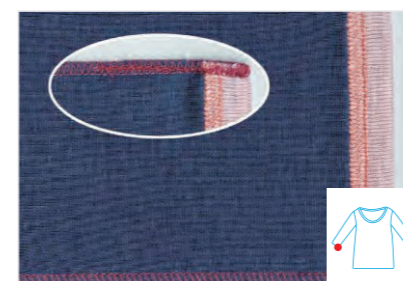


Three threads back latching stitch
P17



Three threads baby overlock stitch
P15

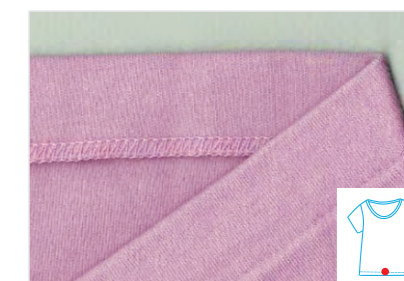

Three threads blindstitch hemming
P15

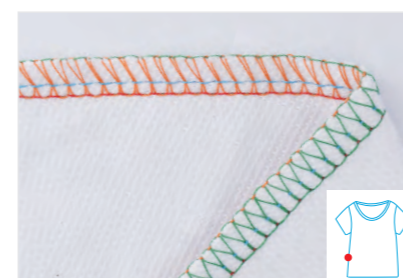

Four threads stitch
P15



Four threads back latching stitch
P17



Four threads shirring stitch
P18



Four thread tape attach stitch
P15




Five threads stitch
P15



Five threads heavy duty stitch
P15



Five threads pocket
double chain rolling stitch
P15

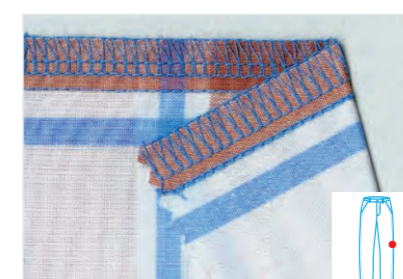


Six threads sewing
P15




Four threads variable top feed
P18

Four Thread Interlock

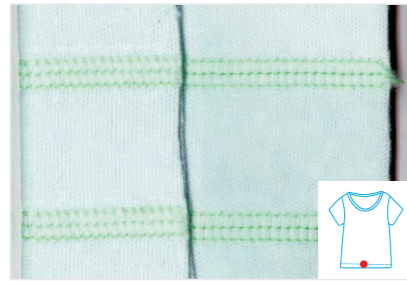

Plain seaming
P21/P22/P23

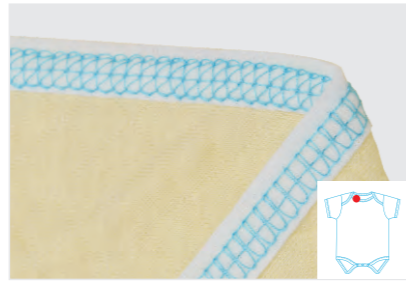


Tape binding
P21/P22




Covering stitch (one side)
P21/P22



Covering stitch
P21/P22

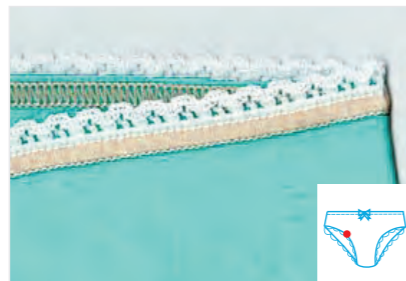

Elastic lace attaching
P22

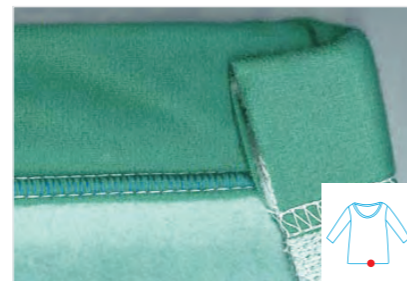


Bottom hemming
P21/P22/P23



Bottom hemming (left cutter)
P21



Cylinder cover stitch
P23

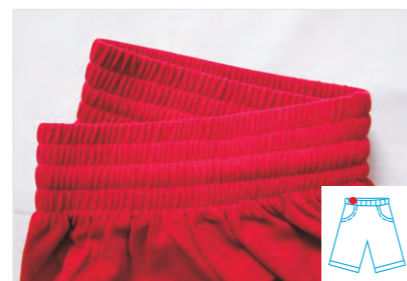


Elastic attaching
P24



T-shirt folding seaming
P24




Tape attaching
P24

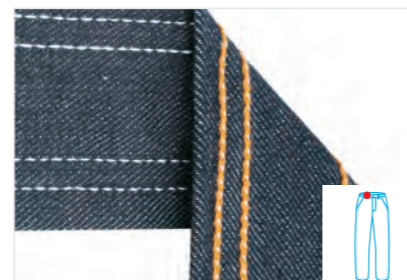


Waist band
P24

Button Holing/Button Attaching

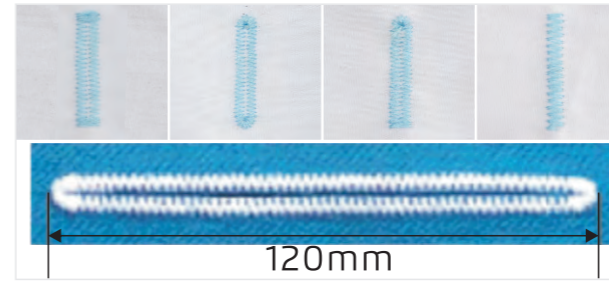


Button holing stitch
P33

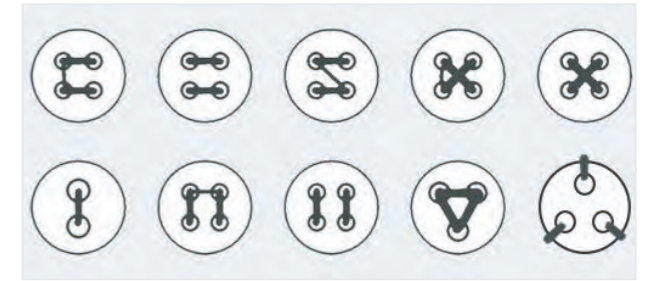

Button attaching stitch
P32/P35


Bartacking Machine Stitch

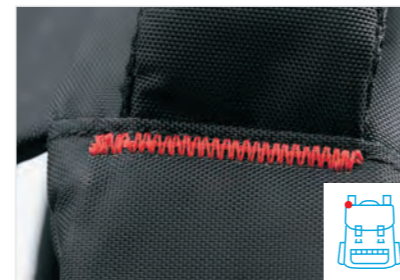


Bartacking stitch
P31




Cap hole stitch
P31

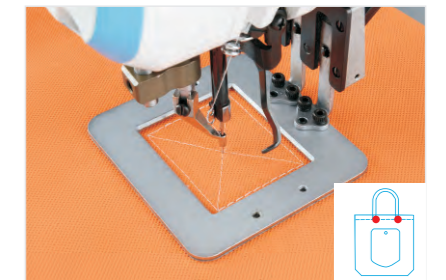


Small pattern
P31

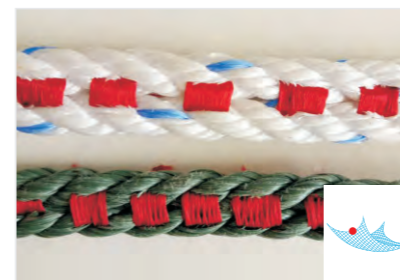

Fishing net
P31

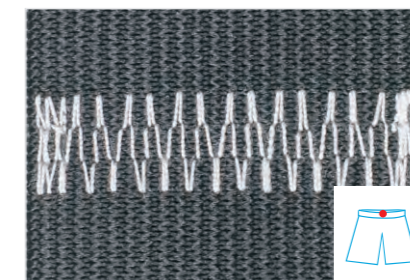


Elastic joint
P31

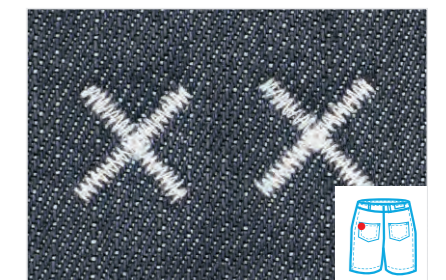


Cross bartacking stitch
P31



Suits bartacking stitch
P31

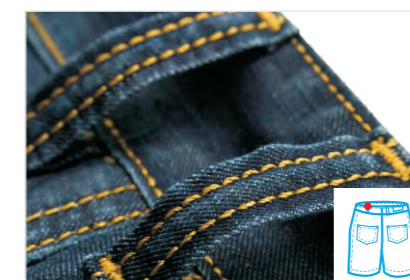

Jeans bartacking stitch
P31

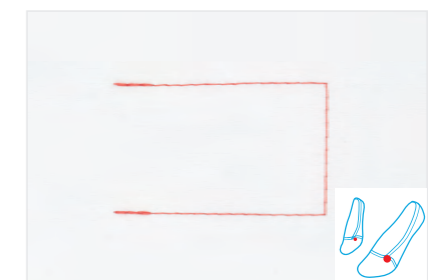


Bartacking for socks
P31

Pattern Stitch

Apparel



Non-apparel

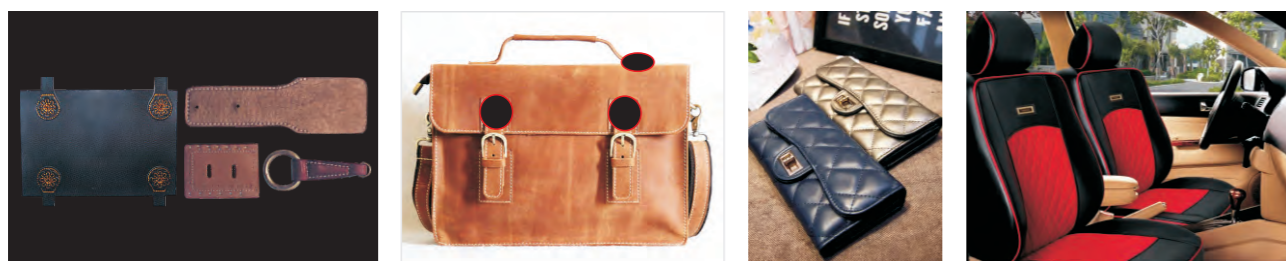


Home textile



Others



Chain Stitch

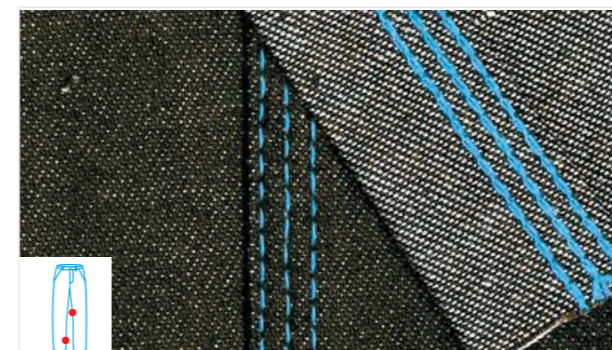

Triple needle feed-off-the arm machine
P36




Double needle feed-off-the arm machine
P36

Placket Samples



Visible placket
P30

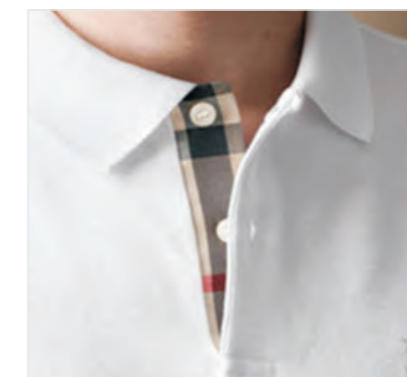

Invisible placket
P30



"V" placket
P30

Pocket Stitch



Single welt pocket
P29



Double welt pocket
P29



Double welt pocket with flap
P29