

# NW・WX・NL SERIES

NW-WXシリーズは、フラットベッド、高速・高性能両面飾り偏平縫いミシンです。



1本針のNLから4本針のモデル(NW8804GD)まで、偏平縫いからテープ付け、かぶせ縫い、レースゴム付け、テープ取り、ポケット向布付け、シェルステッチテープ付けなど応用範囲の広いシリーズです。プッシュボタン式送り調節機構により、容易に縫い目の長さを調節することができます(最大4mm、6針/インチ)。安定した縫い調子、伸びのある美しい縫い目からあらゆるニット、メリヤス製品に最適です。

NW-WX series is flatbed, high speed, high performance with top and bottom cover stitch that have from 1 needle (NL) to 4 needle (NW8804GD), to be applied for any type of fabric and operation like plain stitch, covering, attaching elastic lace, taping, attaching pocket facing, shell stitching plus tape binding, and so on. Stitch length can be adjusted by push button easily (max. 4mm, 6 stitch/ inch). This series is most suitable for knit fabrics in order to achieve uniform, flexible and beautiful stitch formation.


NW-WX series maquina de carna plana, alta velocidad con recubridor arriba y abajo, desde una aguja, modelo NL hasta cuatro agujas, modelo WX8842-1 es posible usarlo en cualquier clase de telas y operaciones, tales como puntada regular, recubrir-pegar cinta elastica, forros de bolcillo, puntada de concha y otras mas. El largo de puntada se regula facilmente aplicando precion al boton regulador(max.:4mm, 6 puntadas por pulgada). Esta serie produce una puntada bonita y uniforme en telas de punto.


NW-WX 系列是平台式、高速、高性能两面绗缝的缝纫机。功能有一般装饰缝、滚领、花边松紧、滚条、裤袋的内衬布缝等广范围的系列缝纫机。通过按钮式调节, 简易改变缝纫线迹长度<最大 4mm, 6 针 / 1 英寸> 安定的缝纫, 美观的可伸缩的线迹为针织最合适。

## NW, WX/UFシリーズ 表示方法

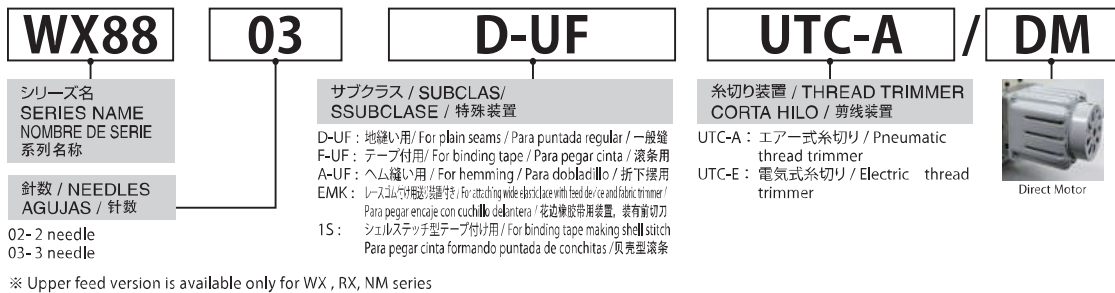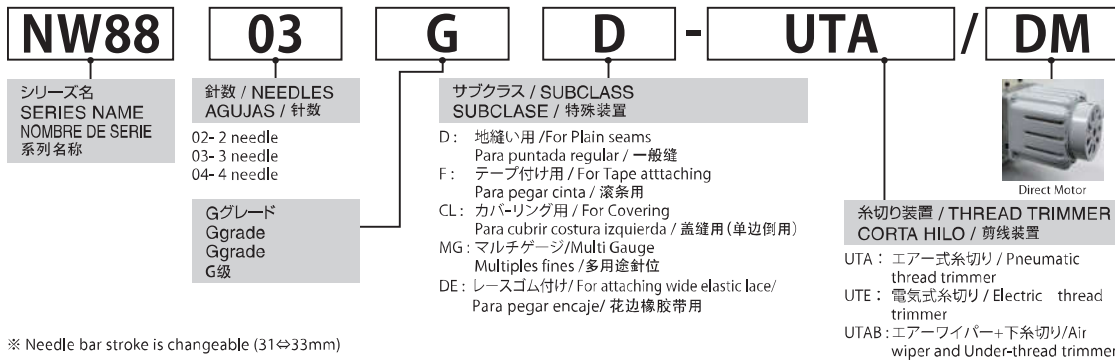

## NLシリーズ 表示方法

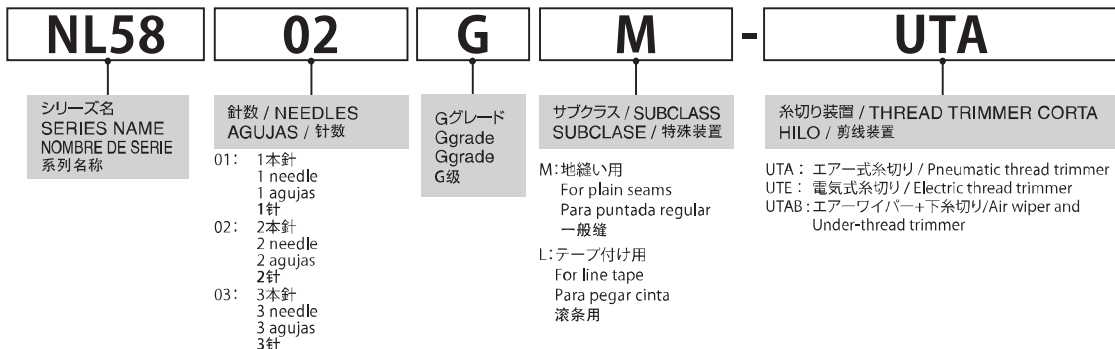



## INDUSTRIAL SEWING MACHINES PRODUCTS GUIDE

TOP & BOTTOM

NW・WX・NL SERIES


KC SERIES

NR・NR・RX・UF SERIES

NC・NM・UF SERIES

NFS SERIES

### NW8803GD

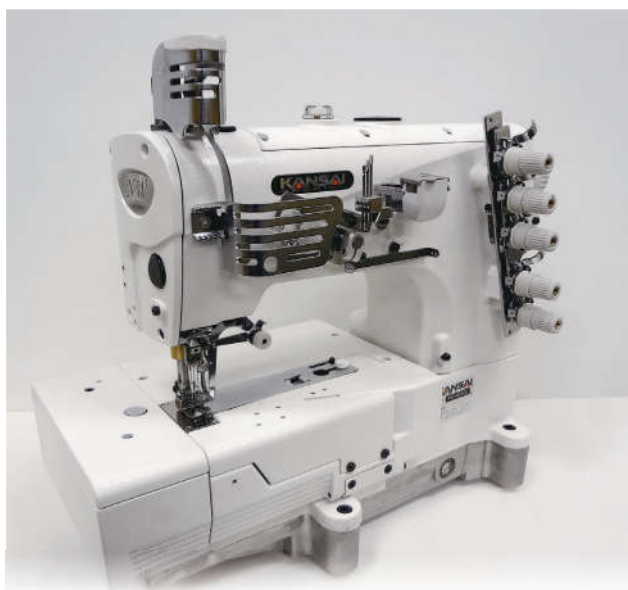


3本針両面飾り地縫いミシン

3 needle, flatbed, high speed, top and bottom cover stitch machine for plain seams


3 agujas doble cadeneta con recubridor superior y inferior para puntada regular

3 针两面装饰，平台式绷缝机



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8803GD	3	5	UYX128GAS 9~14	UYX128GAS 60~90	7/32, 1/4	8~16 (1.6~3.2mm)	0.7~2	6	31 (31⇄33)	6000
NW8803GD-UTA NW8803GD-UTE										

### NW8803GF

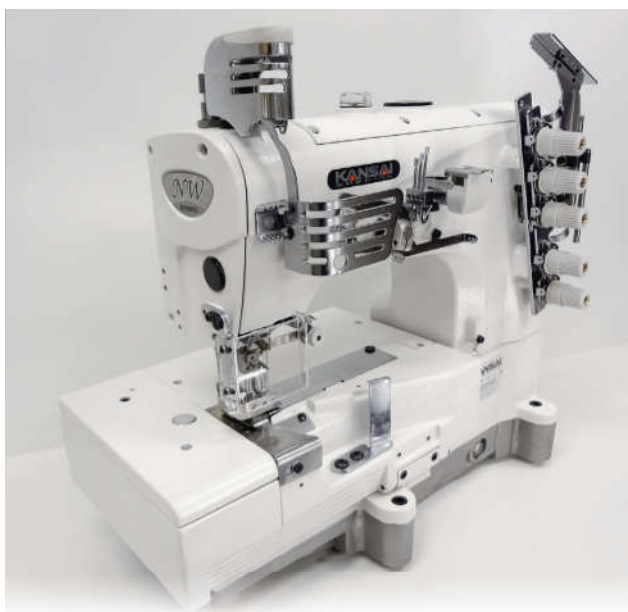

3本針両面飾りテープ付け用ミシン


3 needle, flatbed, high speed, top and bottom cover stitch machine for tape binding

3 agujas, para pegar cintas


3 针两面装饰平台式滚领绷缝机



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8803GF	3	5	UYX128GAS 9~14	UYX128GAS 60~90	7/32, 1/4	8~16 (1.6~3.2mm)	0.7~2	6	31 (31⇄33)	6000



# NW8803GMG

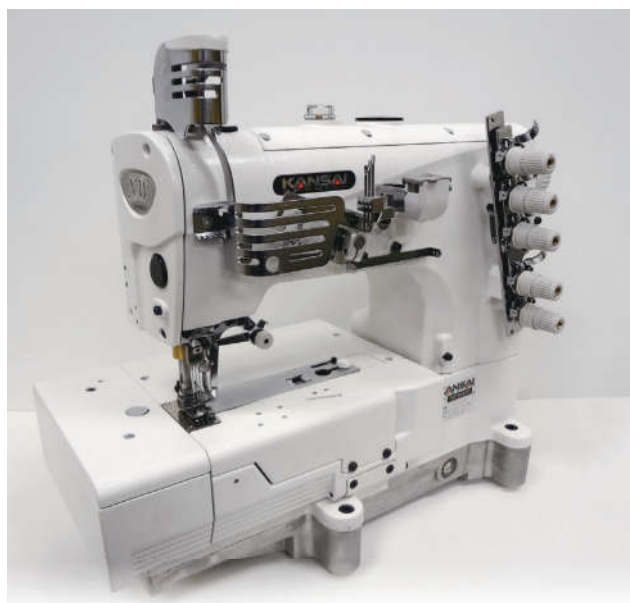


3本針両面飾りミシン  
マルチゲージ（地縫い、ヘム縫い、テープ取り）

3 needles, flatbed, top and bottom cover stitch machine  
multi gauge (plain seam, hemming, tape binding)

3 agujas, doble cadeneta con recubridor superior y inferior para de múltiples fines

平台式 3 針 5 线綳縫机  
多用途针位（基本縫，下摆，拉滚领）



## 標準装備 / STANDARD EQUIPMENT / Equipo normal / 标准配件


テープ取り用（Fタイプ） / For tape binding (F type) / Para pegar collarete (Tipo F) / 拉滚领用（F型）




裾縫い用（Aタイプ） / For Hemming (A type) / Para dobladillo (Tipo A) / 下摆用（A型）



### For tape attaching

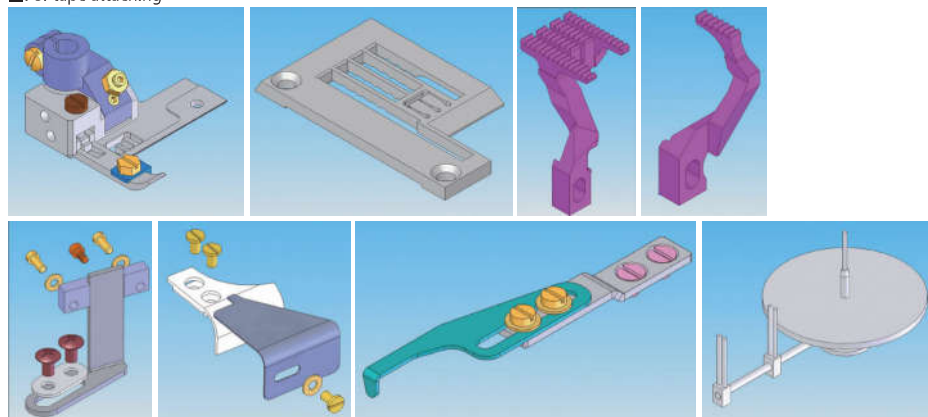


### For hemming



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8803GMG	3	5	UYX128GAS 9~14	UYX128GAS 60~90	7/32, 1/4	8~16 (1.6~3.2mm)	0.7~2	6	31 (31↔33)	6000

※ Needle bar stroke is changeable (31↔33mm)



# INDUSTRIAL SEWING MACHINES PRODUCTS GUIDE

TOP & BOTTOM

NW・WX・NL SERIES

KC SERIES

NR・NR・RX-UF SERIES

NC・NM-UF SERIES

NFS SERIES

## NW8803GCL



3本針両面飾り片倒しカバーリング用ミシン

3 needle, flatbed, high speed, top and bottom cover stitch machine for covering left fold of overlock seams

3 agujas, cama plana, recubridor superior e inferior para cubrir costura de over lock

3 针两面装饰线迹包边缝缝机 (单面倒盖缝)


C TYPE



FRONT


BACK

CL TYPE




FRONT

BACK

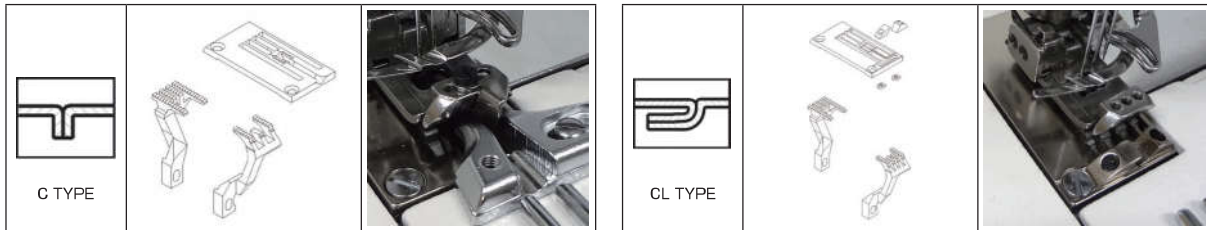

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8802GCL NW8802GCL-UTA NW8802GCL-UTE	2	4	UYX128GAS 9~14	UYX128GAS 60~90	3/16	8~16 (1.6~3.2mm)	0.7~2	6	31 (31⇄33)	6000
NW8803GCL NW8803GCL-UTA NW8803GCL-UTE	3	5			7/32, 1/4					

## WX8803F-UF




3本針両面飾り上下差動送り付テープ付け用ミシン

3 needle, flatbed, high speed, top and bottom cover stitch machine for tape binding with upper feed mechanism

3 agujas con alimentador superior para pegar cinta


3 针两面装饰平台式上下同步滚领缝缝机



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Upper Feed Amount (mm)		Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)				←→	↑↓			
WX8802F-UF	2	4	UYX128GAS 9~14	UYX128GAS 60~90	1/8, 3/16	8~16 (1.6~3.2mm)	0.7~2	1~7	3.5~6	6	33	5500
WX8803F-UF	3	5			7/32, 1/4, 3/16							



## NW8803GD-WD



● オール&オール2重飾り  
All & all -Dual stitch  
Todo y todo-doble recubridor superior  
全部双重装饰缝或者全部混合  
双重装饰缝



● ハーフ&ハーフ2重飾り  
Half & half -Dual stitch  
Mitad y mitad-doble recubridor superior  
全部双重装饰缝或者半边混合  
装饰缝



● オール&ハーフ2重飾り  
All & half -Dual stitch  
Todo y mitad-doble  
recubridor superior  
半边双重装饰缝或者混合半边  
装饰缝




3本針上面ダブル飾り下面飾り縫い地縫い  
ミシン

3 needle, flatbed, high speed dual  
top and bottom cover stitch machine for  
plain seam



3 agujas, cama plana, alta  
velocidad, doble recubridor  
superior y recubridor inferior para  
puntada regular.

3 针上面双重装饰缝下面绷缝缝纫机



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	NeedleBar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8803GD-WD	3	5	UY × 128GAS 10~14(標準11)	UY × 128GAS 65~90(標準75)	7/32", 1/4"	10~16	0.7~2	4.5	31	5000

## WX8803EMK

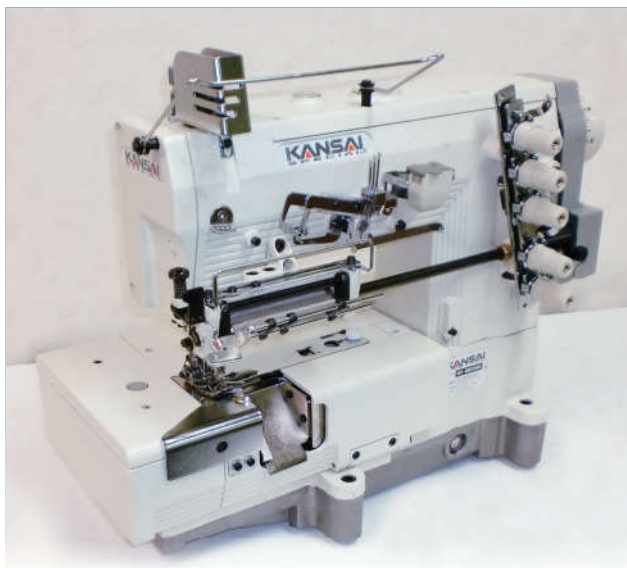


3本針両面飾り前メス付ゴム送り装置付  
ミシン

3 needle, flatbed, top and bottom  
cover stitch machine with a fabric  
trimmer and elastic feeding  
mechanism for attaching elastic lace

3 agujas, recubridor superior  
e inferior con cuchillo al frente  
y dosificador de elastico  
superior, con mecanismo para  
pegar encajes

3 针两面装饰迹迹绷缝机  
(带前切刀, 上松紧带用装置)




FRONT




BACK

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	NeedleBar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
WX8802EMK	2	4	UYX128GAS 9~14	UYX128GAS 60~90	1/8, 3/16, 5/32	8~16 (1.6~3.2mm)	0.7~2	5	31	5000
WX8803EMK	3	5			7/32, 1/4					

INDUSTRIAL SEWING MACHINES  
PRODUCTS GUIDE

## NW8842-1G



FRONT



BACK



NW8842-1G

ポケット向当布付用3本針上飾り縫い  
ミシン安全縫い二重環付のため強度面で  
優れています。

3 needle, flatbed, top cover stitch  
machine with safety stitch for  
attaching pocket facings  
Double chain stitch produces  
durable seams

3 agujas doble cadeneta con  
recubridor superior, para pegar  
forros de bolsillo

< NW8842-1G >

3 针上面装饰, 缝装兜用缝边机




NW8842-1G

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (mm)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8842-1G	3	7	UYX128GAS 9~14	UYX128GAS 60~90	2.4×6.4	7~16 (1.6~3.6mm)	0.7~2	4.5	31	5000

## WX8803-1S



FRONT 4:1



FRONT 5:1



FRONT 6:1



BACK



WX8803-1SMC30

4本針両面飾り縫いシェルステッチテー  
プ取りミシン(2~4本までの下記表の  
ゲージの種類があります。)また、新モデル  
ではシェルの幅を3段階で調節できます


4 needle, flatbed, top and bottom cover  
stitch machine for the shell (scallop)  
stitching with tape binding  
3 kinds of the shell (scallop) sizes  
such as small, medium and big are  
adjustable

3y 1 agujas, recubridor superior e inferior, 1  
aguja con doble, cadeneta, formando  
puntada decorativa de conchitas


4 针两面装饰线迹, 贝壳缝胶带  
(有 2 到 4 针的针位种类)  
还可以贝壳缝的距离调整 3 段



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (mm)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
WX8802-1S	3	6	UYX128GAS 9~14	UYX128GAS 60~90	3.5×4	8~16 (1.6~3.2mm)	0.7~2	6	31	4500
WX8803-1S	4	7			5.6×4					



## NW8804GD

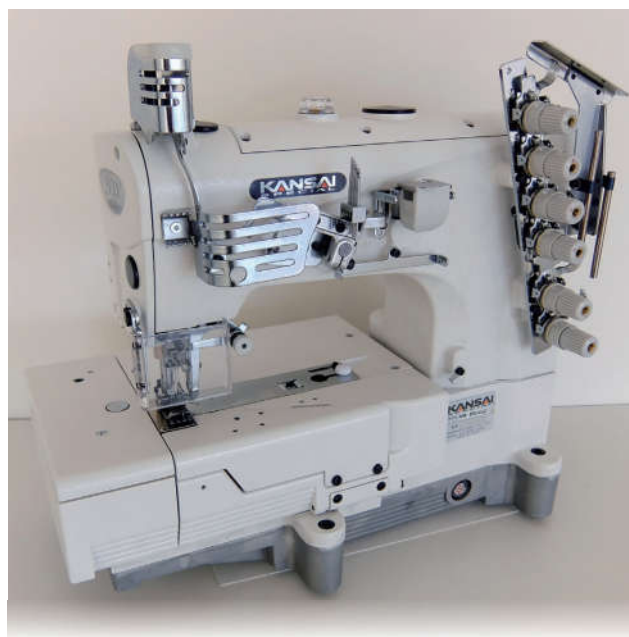

4本針両面飾り縫いミシン  
ブリーフの股継ぎなどフラットシーマの  
代わりとしてお使い頂けます。

4 needle, flatbed, top and bottom  
cover stitch machine for joining  
the crotch of briefs, instead of flat  
seamer

4 agujas, cama plana, recubridor  
superior e inferior para unir costuras

4 针两面装饰, 平台式绷缝机



FRONT



BACK

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (mm)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NW8804GD	4	6	SM1014H 10S		6	8~16 (1.6~3.2mm)	0.7~2	6	31	4000
NW8804GD-UTA										

## NL5802GLR




2本針二重環縫い、フラットベッド、ラップ  
シーム用押え付きミシン

2 needle, flatbed, double chain  
stitch machine for lap seam with  
original presser foot

2 agujas, flatbed, la maquina de  
puntada de cadena doble para  
la costura del regazo con pie del  
presser original


2 针两重环缝, 平台式埋夹缝缝纫机  
(另外配备反向埋夹缝压脚。)



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (mm)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NL5802GLR	2	4	UY128 GAS #16	UYX128 GAS 100	6.4	8~16 (1.6~3.2mm)		8	33	6000







## INDUSTRIAL SEWING MACHINES PRODUCTS GUIDE

TOP & BOTTOM

NW・WX・NL SERIES

KC SERIES

NR・NR・RX・UF SERIES

NC・NM・UF SERIES

NFS SERIES

### NL5802GL



2本針二重環縫いテープ付ミシン

2 needle, flatbed, double chain stitch machine for attaching line tapes

2 agujas doble cadeneta; cama plana, para pegar cintas

2 针双重环缝，平台式滚领缝切机



MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NL5802GL	2	4	UYX128GAS 9~14	UYX128GAS 60~90	3/16, 1/4, 3/8	8~16 (1.6~3.2mm)	0.7~2	8	31	6000

### NL5802GTMF



2本針二重環縫い、タンデム針ゲージ、マジック押え付ミシン  
(特殊押えにより空環をきれいに出すことができます。)

2 needle (tandem needles), flatbed, double chain stitch machine with Magic Presser Foot (chain off can be made by the magic foot)

2 agujas (agujas tandem) doble cadeneta (agujas en linea), cama plana

2 针双重环缝，平台式缝切机 (0 针位)



FRONT




BACK

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (mm)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NL5802GMF	2	4	UYX128GAS 9~14	UYX128GAS 60~90	2.4	8~16 (1.6~3.2mm)	0.7~2	8	31	6000
NL5802GTMF					0.4 (1/64 Inch)					



# NL5803GPXP




3本針フラットベッド二重環縫いラップシーム用ミシン。

3 needle, flatbed, double chain stitch machine for lap seaming

3 agujas, cama plana, máquina de doble cadeneta para costura de cerrar

3 针双重环缝，平台式包边缝纫机



## NL5803GPXP accessories



- Lap seam folder(6.4mm)
- Presser foot for closing the side stitch
- Standard Presser foot
- Smooth rubber puller

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)						
NL5803GPXP	3	6	TV×5 18		1/4	6~14		8	31	5000

## WX OTHER MODELS TECHNICAL DATA 仕様明細

MODEL	No. of Needle	No. of Thread	Needle Type		Gauge (Inch)	No. of Stitch (Stitch/Inch)	Diff. Feed Ratio	Upper Feed Amount (mm)		Presser Foot Lift (mm)	Needle Bar Stroke (mm)	Max. Speed (rpm)
			Organ (#)	Schmetz (Nm)				↔	↕			
NW8803GDE	3	5	UYX128GAS 9~14	UYX128GAS 60~90	7/32, 1/4	8~16 (1.6~3.2mm)	0.7~2	1~7 3.5~6		6	33	5500
WX8803D-UF					3/16, 7/32, 1/4							
WX8803D-UF-UTC-A/E					3/16							
WX8802A-UF					7/32, 1/4							
WX8803A-UF	2	4			1/4	6 (4.2mm)						
WX8803AH-UF	3	5	UYX128GAS 18		1/4	6 (4.2mm)						

## NL OTHER MODELS TECHNICAL DATA 仕様明細

NL5801G	1	2	UYX128GAS 9~14	UYX128GAS 60~90		8~16 (1.6~3.2mm)	0.7~2	8	31	6000
NL5801G-UTAB	1	2			1/4 (6.4mm)					
NL5802GM	2	4								
NL5803GPHD	3	6	TV×5 18		1/4, 3/8, 5/16	6~14				5000
NL5803GPTF										