

BRUCE 布鲁斯

BRUCE 布鲁斯

400-8890-100
www.chinabruce.cn



B6

薄厚可调的电脑包缝机

Thickness Adjustable Automatic Overlock Machine



怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP


台州市布鲁斯缝制设备有限公司
TaiZhou Bruce Sewing Machine Co., Ltd.
浙江省台州市椒江区东海大道东段1008号2号楼
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang
District Taizhou, Zhejiang.

2020.07

怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

B6

品名：薄厚可调的电脑包缝机
Thickness Adjustable Automatic Overlock Machine

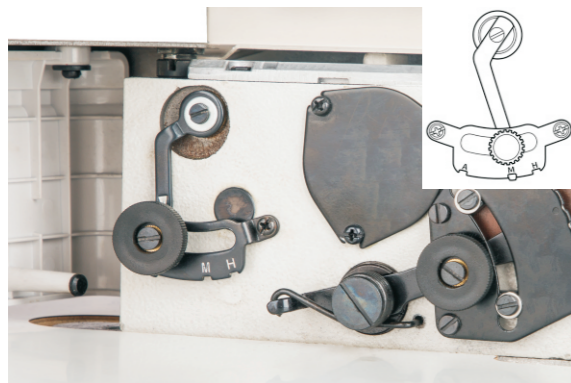


薄中厚可调，适应换季单

Quick thickness adjustment device more suitable for different seasons

采用薄中厚独家专利技术，适应各类如网纱、针织、牛仔等不用换季面料和工艺缝制。

Patented device, applicable to gauze, knitting, jeans fabric.


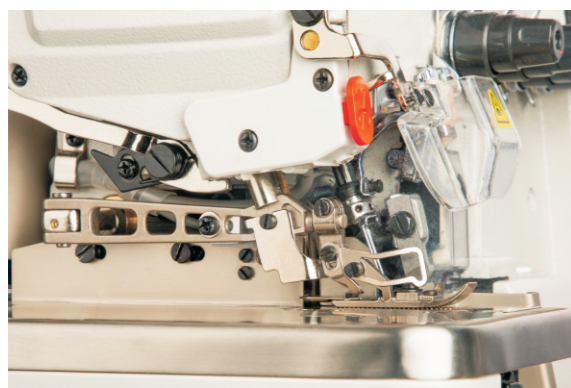


厚料骨位爬坡更有力

More powerful & strong over-stem sewing for heavy duty

应对不同梗缝工艺，通过薄厚检测，实现自动降速加力，爬坡更有力。

Thickness detective device is applicable to different over-stem requirements. lower speed automatically ensures more powerful for over-stem sewing.

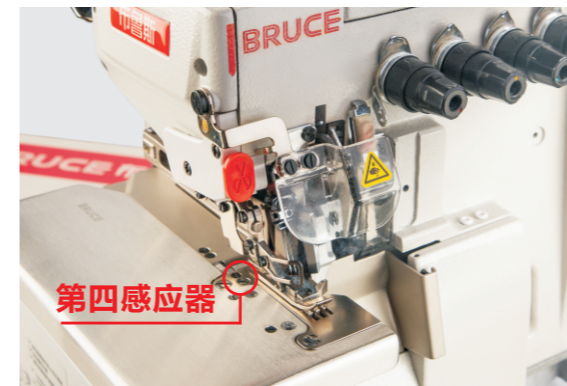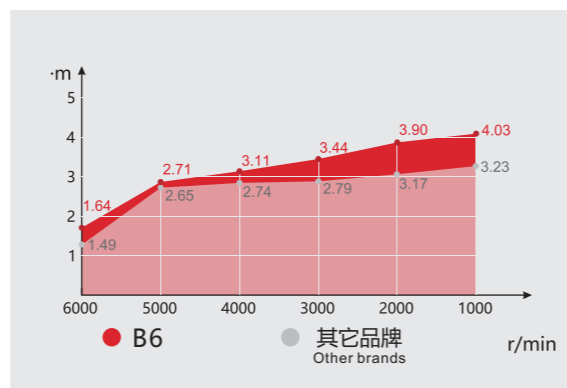

前后短线头、不用修剪

Short thread, without trimmer

采用短线头感应器，线头长短不再依赖操作者手势，使缝后线头在5mm以内，无需二次修剪。

Short thread trimmer can achieve within 5mm thread remainings automatically and without manual trimming again.




经久耐用，稳定可靠

More durable & reliable

核心运动部件应用新材料、新工艺，保证机器在高速运转下耐磨性强、寿命超长。

New material & technology is applied to core parts, which ensures strong durability and long life span.

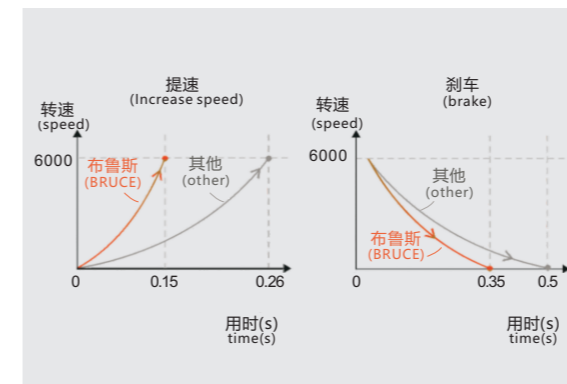


起缝响应，动力强劲

Strong and powerful start & braking sewing reactions

精准用户研究，重点提升起停响应时间，缩短50%时间，各类工艺操作更快捷。

Improve 50% efficiency for start & braking functions after studying customers' demands, which providing fast sewing experience.

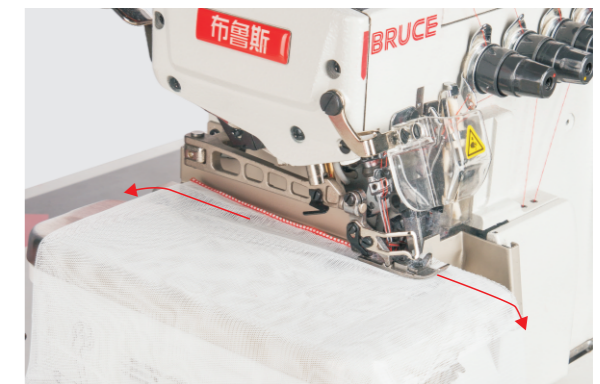

前后吸尘、清洁缝份 B6/KS (气动)

Front & back sucking functions, ensure clean sewing B6/KS (pneumatic type)

前吸废料，后吸线头，有效防尘、清洁环保。

Front sucking device clears trash; back sucking device clears thread remainings, which prevents dust and keep clean sewing.

技术参数 Specification

Model	包兜缝 Pocket binding seaming	基本缝 Plain seaming	密接缝 Narrow stitch seaming	无纺布 Non-woven fabric	基本缝 Plain seaming	厚料 Heavy fabric	宽边可调 Width Adjustable	毛巾缝 Towel specialized	包条缝 Strip attach seaming	5×5线迹 5×5 stitch	3×4线迹 3×4 stitch	极厚料 Extra heavy fabric	牛仔专用 Demin	基本缝 Plain seaming	牛仔专用 Demin
B6-02×250	DC×27 14#	2 4 5	—	4	0.7-2	3.5	7000	525*360*510	32.3/40.3						
B6-3-02/233	DC×27 11#	1 3	—	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-3-32R2/223	DC×27 9#	1 3	—	1.5	4	5	7000	525*360*510	32.3/40.3						
B6WF-3-02/213	DC×27 14#	1 3	—	4	8.5	5.5	7000	525*360*510	32.3/40.3						
B6-4-M03/333	DC×27 11#	2 4	2 4	4	0.7-2	5.5	7000	525*360*510	32.3/40.3						
B6-4-M03/333/H/M	DC×27 11#	2 4	2 4	4	0.7-2	6	7000	525*360*510	32.3/40.3						
B6-4-M03/333/AD	DC×27 11#	2 4	2 4	4	0.7-2	5.5	7000	525*360*510	32.3/40.3						
B6MJ-4-53/233	DC×27 11#	2 4	2 4	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-5-53/233	DC×27 14#	2 5	3 5	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-5-03/233	DC×27 14#	2 5	5 5	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-5-03/333	DC×27 14#	2 5	3 4	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-5-A04/435	DC×27 19#	2 5	5 6	5	0.8-1.5	7	7000	525*360*510	32.3/40.3						
B6-5-M04/435	DC×27 19#	2 5	5 6	5	0.8-1.5	7	7000	525*360*510	32.3/40.3						
B6-6-03/333	DC×27 11#	3 6	3×2 4	4	0.7-2	5	7000	525*360*510	32.3/40.3						
B6-6-M04/435	DC×27 19#	3 6	5×2.5 3.5	5	0.8-1.5	7	7000	525*360*510	32.3/40.3						

注 (Note) :

- H/M: 薄厚适应性广，选配X (吸风管剪线刀) ;
H/M: Light and heavy materials are good adaptability;
- 选配SD (前后气吸装置) , KS: 侧吸切线, KH: 横吸切线, AT: 气动砍刀切线;
SD is optional (start and end suction device); KS: Vertical suction device; KH: Horizontal suction device;
- SD款和气动款的整机体积: 525×360×630 (mm) , 整机重量 33/44 (kg) 。
Whole volume with SD and KS: 525×360×630 (mm) ; weight :33/44 (kg) .